


## 620 - Safety Flag LED

Corps: En technopolymère  
 Réflecteur: En plexiglass transparent  
 équipement: Equipé de accessoires pour le fixation ou mur, ou plafond ou à suspension.  
 Version:  
 - Autonomie de 60 minutes se recharge automatiquement en 12 heures.  
 - Autonomie de 180 minutes se recharge automatiquement en 24 heures.  
 NORMES: appareils conformes aux normes EN60598-1 CEI 34-21 en vigueur et présentant l'indice de protection selon les normes EN60529.

### Download

- DXF 2D  
- 620flag.dxf
- Montaggi  
- safety flag.pdf
- BIM  
- 620 - Safety Flag LED - Wall mounting - 20200528.zip  
- 620 - Safety Flag LED - Suspension - 20200528.zip

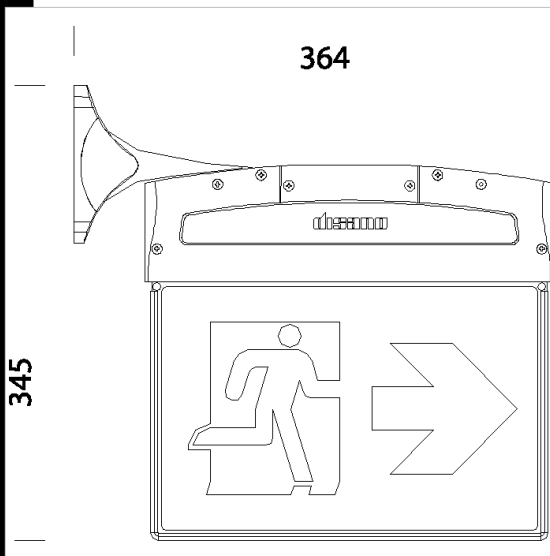

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
112581-00	CLD CEM-L	0,71	LED--6000K-	5 W	GRIS
112582-00	CLD CEM-L	0,83	LED--6000K-	5 W	GRIS

### Accessori



- 470 etichette

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated