




Orienteur 82 mm

En acier. Orientation monodirectionnelle du faisceau lumineux. Pour DICR, ALO.

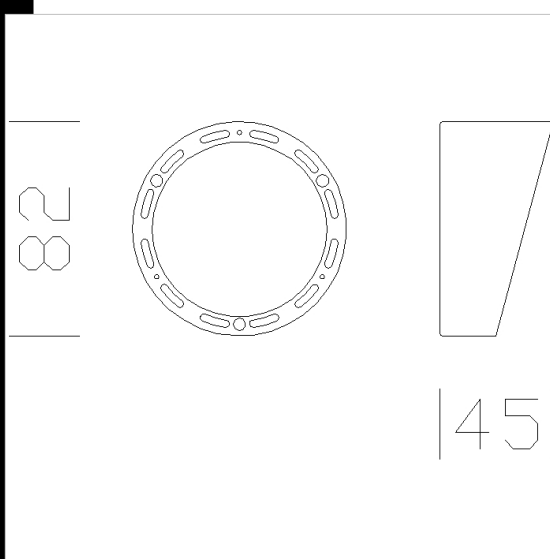

Code	Kg	WTot	Colour
22005277-00	0,50	0 W	ARGENT
22005232-00	0,20	0 W	NOIR
22005222-00	0,20	0 W	BLANC

Prodotti



- Vision C+M - CDM-R



- Vision C+M short - CDM-R -



- Vision C+M - CDM-TC



- Vision C+M short - CDM-TC -



- Vision C+M short - CDM-TC -
FM - Base



- Vision C+M short - CDM-R -
Base



- Mini Leo 5 - Base



- Matrix A2 MASTERLED



- Mini Leo 5 - Adaptateur
universel

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated