

3° IP
IK


Download

DXF 2D
- 5320.dxf



Orienteur 183 mm

En acier. Orientation monodirectionnelle du faisceau lumineux. Pour ALO, R7s, JMTS.

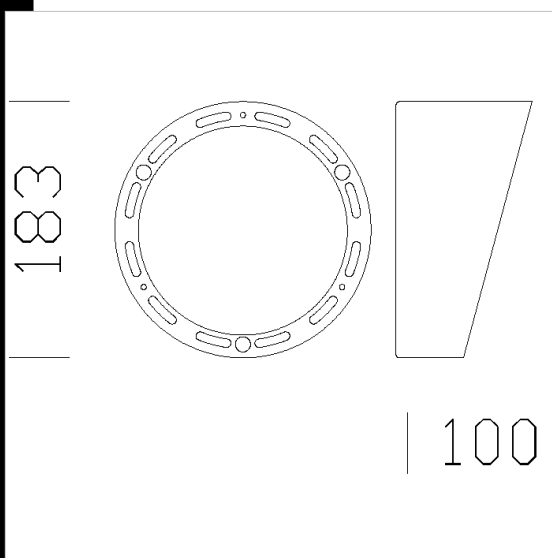

Code	Kg	WTot	Colour
22005370-00	0,30	0 W	ARGENT
22005330-00	0,30	0 W	NOIR
22005320-00	0,20	0 W	BLANC

Prodotti



- Mac 2 T

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated