


Download

DXF 2D
- 22011610.dxf
Montaggi
- SINTESI-Spot rev1.pdf



Sintesi Spot - UGR<22 - module luminaireux

Aluminium extrudé avec étrier de jonction. Pour l'alignement mécanique des profils. Module luminaireux avec réflecteur en polycarbonate métallisé V0 haute performance à micro-facettes.

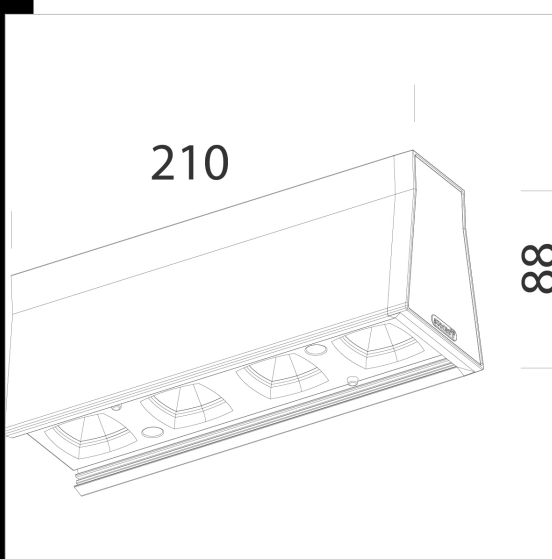

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
22011610-00	CLD	1,00	LED-4320lm-4000K-CRI 80	32 W	BLANC

Prodotti

	- Sintesi System - plafond -		- Sintesi System - suspension lumière directe/indirecte -		- Sintesi System - plafond - avec		- Sintesi System - suspension -
	- Sintesi System - suspension luz directa/indirecta - avec diffuseur UGR<19		- Sintesi System - plafond - optique Dark - UGR<19		- Sintesi System - suspension - optique Dark - UGR<19		- Sintesi System - suspension lumière directe/indirecte - optique Dark - UGR<19
	- Sintesi System - plafond avec diffuseur satiné - UGR<22		- Sintesi System - suspension avec diffuseur satiné - UGR<22		- Sintesi System - suspension lumière directe/indirecte - avec diffuseur satiné - UGR<22		- Sintesi System - plafond asymétrique double 25° - UGR<22
	- Sintesi System - plafond asymétrique 25° - UGR<22		- Sintesi System - suspension lumière directe/indirecte - extensive 60° - UGR<22		- Sintesi System - suspension - extensive		

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated