




Maxi Liset IP54 LED

Corps: en aluminium extrudé oxydé.
 Tête: en aluminium moulé sous pression avec finition peinture poudre polyester pour extérieur.
 Diffuseur : en verre
 Normes: appareils conformes aux normes EN60598-1 CEI 34-21 en vigueur et présentant l'indice de protection selon les normes EN60529.
 Facteur de puissance: >0,95
 Durée de vie 50000h 70% L70B50
 Groupe de risque photobiologique: Groupe 0 (exempt de risque)

Download

DXF 2D
 - maxilisetip54led.dxf

Montaggi
 - maxilisetacc.pdf
 - maxilisetip54.pdf

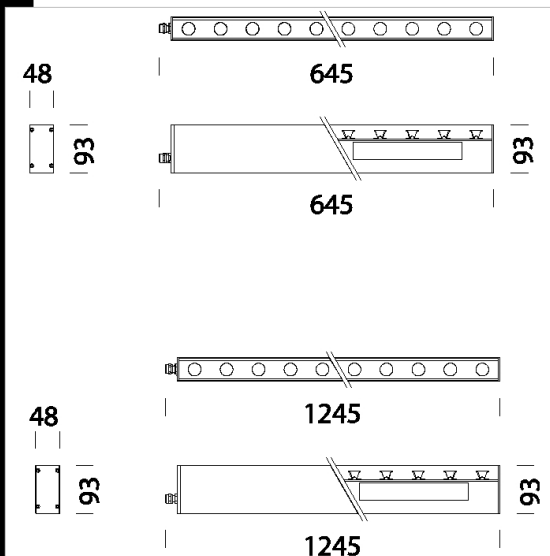

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22019373-00	CLD CELL	2,35	LED-121lm-4100K-CRI 80	19 W	OXYDÉ
22019374-00	CLD CELL	3,65	LED-121lm-4100K-CRI 80	37 W	OXYDÉ

Accessori



- Suspension simple



- Fixation plafond



- Suspension simple



- Fixation suspension elettrificata



- Bracket - Maxi Liset



- Joint d'allineamento - Maxi Liset



- Bracket - Maxi Liset



- Adjustable Bracket - Maxi Liset



- Bracket for Omnitrack - Maxi Liset

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated