

### Download

DXF 2D  
- tortuga.dxf

Montaggi  
- TORTUGA rev5.pdf




## Tortuga Em SA - 220/240V

Corps : en polycarbonate incassable et auto-extinguible. Réflecteur : en polycarbonate, antiéblouissement, incassable et auto-extinguible.

EM version: 3h.

Appareils conformes aux normes EN 60598 CEI 34-21. Indice de protection conforme aux normes EN 60529.

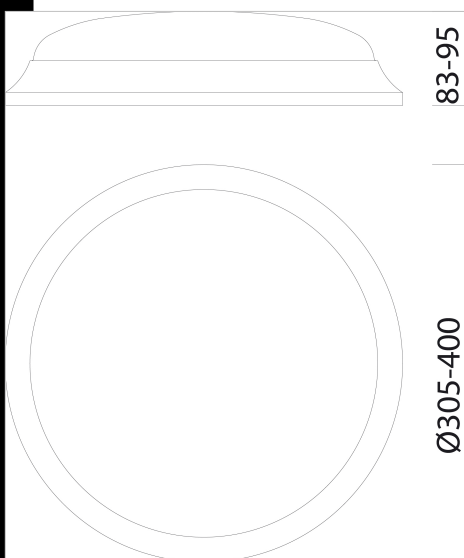

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22042410-09	CLD-E	0,96	LED-1368lm-3000K-CRI>80	18 W	BLANC
22042411-09	CLD-E	0,98	LED-1488lm-4000K-CRI>80	18 W	BLANC
22042412-09	CLD-E	1,50	LED-2403lm-3000K-CRI>80	28 W	BLANC
22042413-09	CLD-E	1,50	LED-2614lm-4000K-CRI>80	30 W	BLANC

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated