


### Télécharger

DXF 2D  
- past.dxf

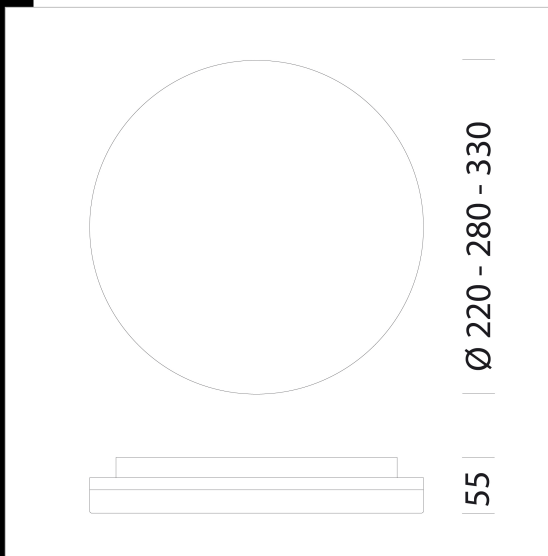

## Pastilla - 100/240 V

Fixtures with or without radar sensor.

Housing: vandal-resistant, self-extinguishing polycarbonate. Diffuser: In clear polycarbonate, anti-dazzle, vandal resistant.

Power supply: AC100/240V.

Manufactured in accordance with EN 60598-CEI 34-21 standards. Degree of protection in accordance with EN 60529 standards.

Code	Cablage	Kg	Lumen Output-K-CRI	WTot	Couleur
22042510-00	CLD CELL	0.53	LED-1328lm-3000K-CRI 80	15 W	BIANCO
22042511-00	CLD CELL	0.65	LED-1347-4000K-CRI 80	15 W	BIANCO
22042512-00	CLD CELL	0.77	LED-1651lm-3000K-CRI 80	18 W	BIANCO
22042513-00	CLD CELL	0.65	LED-1500lm-4000K-CRI 80	18 W	BIANCO
22042514-00	CLD CELL	1.01	LED-2050lm-3000K-CRI 80	24 W	BIANCO
22042515-00	CLD CELL	0.65	LED-1308lm-4000K-CRI 80	24 W	BIANCO
22042510-19	CLD CELL	0.60	LED-1328lm-3000K-CRI 80	15 W	BIANCO
22042511-19	CLD CELL	0.71	LED-1250lm-4000K-CRI 80	15 W	BIANCO
22042512-19	CLD CELL	0.71	LED-1651lm-3000K-CRI 80	18 W	BIANCO
22042513-19	CLD CELL	0.71	LED-1500lm-4000K-CRI 80	18 W	BIANCO
22042514-19	CLD CELL	1.05	LED-2273lm-3000K-CRI 80	24 W	BIANCO
22042515-19	CLD CELL	0.71	LED-2050lm-4000K-CRI 80	24 W	BIANCO

Le flux lumineux mentionné est le flux lumineux sortant du luminaire, avec une tolérance de  $\pm 10\%$  par rapport à la valeur indiquée. Les W totaux expriment la puissance totale consommée par le système avec une tolérance maximale de  $10\%$