

CLD

IP40



IK07

Download


DXF 2D
- curve.dxf

Montaggi
- CURVE_RIFLESSO.pdf



Curve

Corps : aluminium peint, prêt pour un montage mural. LED : maintien du flux lumineux à 70%: 36.000h (L70B50). Facteur de puissance >0,9.

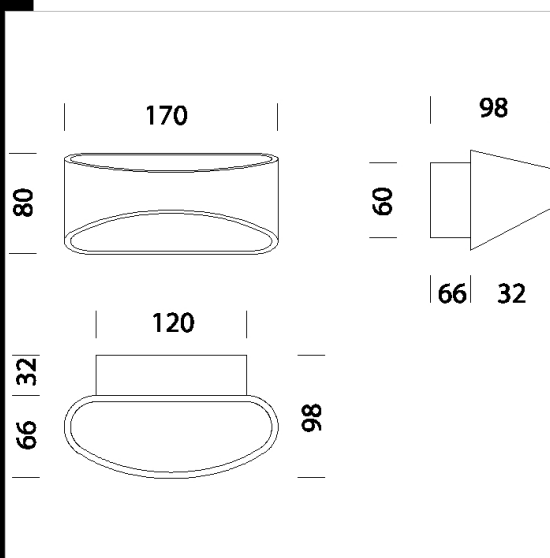

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22084811-00	CLD	0,60	LED-351-3000K-CRI>80	6 W	BLANC

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated