

Download

DXF 2D
- luh2.dxf

Montaggi
- Luthor rev6.pdf



Luthor Medium - Professional

La gamme des downlights Luthor présente maintenant les trois dimensions. Ainsi elle peut être installée dans tous les trous d'encastrement.

Les downlights orientables Luthor LED font une lumière d'avant-garde. Ces produits sont très robustes, d'excellente qualité et à haute performance. Ils sont parfaits pour l'éclairage des grandes surfaces commerciales.

Corps medium: en aluminium moulé sous pression

Réflecteur : en polycarbonate métallisé haut rendement.

Peinture: en poudre avec peinture époxydique en polyester résistant aux rayons UV.

Normes: produits conformes aux normes EN 60598-1 CEI 34-21. Indice de protection conforme aux normes EN 60529.


LED: Sources lumineuses haute efficacité (CRI 93).

Facteur de puissance: >= 0,95

Groupe de risque photobiologique : Groupe 0 (exempt de risque).

Maintien du flux lumineux à 80%: 50.000h (L80B20).

encastrée Ø 140/160mm

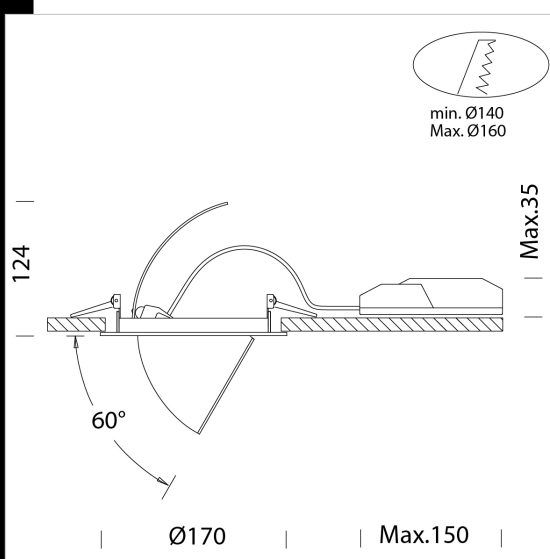

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22087819-00	CLD CELL	0,96	LED COB-2499lm-3000K-18°-CRI 93	28 W	BIANCO
22087879-00	CLD CELL	0,99	LED COB-2499lm-3000K-18°-CRI 93	28 W	ARGENTO
22087839-00	CLD CELL	0,90	LED COB-2499lm-3000K-18°-CRI 93	27 W	NERO
22087819-09	CLD CELL-E	1,60	LED COB-2499lm-3000K-18°-CRI 93	28 W	BIANCO
22087879-09	CLD CELL-E	1,60	LED COB-2499lm-3000K-18°-CRI 93	28 W	ARGENTO
22087819-31	CLD CELL-E	1,60	LED COB-2499lm-3000K-18°-CRI 93	28 W	BIANCO
22087879-31	CLD CELL-E	1,60	LED COB-2499lm-3000K-18°-CRI 93	28 W	ARGENTO
22087819-1241	CLD CELL-D-D	1,00	LED COB-2499lm-3000K-18°-CRI 93	28 W	BIANCO
22087879-1241	CLD CELL-D-D	1,00	LED COB-2573lm-3000K-18°-CRI 93	28 W	ARGENTO
22087819-68	CLD CELL	0,96	LED COB-2754lm-4000K-18°-CRI 93	28 W	BIANCO
22087879-68	CLD CELL	0,87	LED COB-2754lm-4000K-18°-CRI 93	28 W	ARGENTO
22087819-6809	CLD CELL-E	1,60	LED COB-2754lm-4000K-18°-CRI 93	27 W	BIANCO
22087879-6809	CLD CELL-E	1,60	LED COB-2754lm-4000K-18°-CRI 93	27 W	ARGENTO
22087819-6841	CLD CELL-D-D	1,02	LED COB-2754lm-4000K-18°-CRI 93	27 W	BIANCO
22087879-6841	CLD CELL-D-D	1,00	LED COB-2754lm-4000K-18°-CRI 93	27 W	ARGENTO
22088910-00	CLD CELL	0,98	LED COB-2440lm-3000K-35°-CRI 93	26 W	BIANCO
22088970-00	CLD CELL	0,93	LED COB-2440lm-3000K-35°-CRI 93	26 W	ARGENTO
22088910-09	CLD CELL-E	1,60	LED COB-2487lm-3000K-35°-CRI 93	26 W	BIANCO
22088970-09	CLD CELL-E	1,60	LED COB-2487lm-3000K-35°-CRI 93	26 W	ARGENTO
22088910-31	CLD CELL-E	1,60	LED COB-2487lm-3000K-35°-CRI 93	26 W	BIANCO
22088970-31	CLD CELL-E	1,60	LED COB-2487lm-3000K-35°-CRI 93	26 W	ARGENTO
22088910-1241	CLD CELL-D-D	0,95	LED COB-2487lm-3000K-35°-CRI 93	27 W	BIANCO
22088970-1241	CLD CELL-D-D	0,90	LED COB-2487lm-3000K-35°-CRI 93	26 W	ARGENTO
22088910-68	CLD CELL	0,97	LED COB-2610lm-4000K-35°-CRI 93	26 W	BIANCO
22088970-68	CLD CELL	0,89	LED COB-2610lm-4000K-35°-CRI 93	26 W	ARGENTO
22088910-6809	CLD CELL-E	1,60	LED COB-2610lm-4000K-35°-CRI 93	26 W	BIANCO
22088970-6809	CLD CELL-E	1,60	LED COB-2610lm-4000K-35°-CRI 93	26 W	ARGENTO
22088910-3113	CLD CELL-E	1,60	LED COB-2610lm-4000K-35°-CRI 93	26 W	BIANCO
22088970-3113	CLD CELL-E	1,60	LED COB-2610lm-4000K-35°-CRI 93	26 W	ARGENTO
22088910-6841	CLD CELL-D-D	1,07	LED COB-2610lm-4000K-35°-CRI 93	26 W	BIANCO
22088970-6841	CLD CELL-D-D	1,00	LED COB-2610lm-4000K-35°-CRI 93	26 W	ARGENTO
22087839-29	CLD CELL	0,90	LED COB-2440lm-3000K-35°-CRI 93	27 W	NERO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Luthor Medium - Professional

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22088911-00	CLD CELL	0,97	LED COB-2440lm-3000K-35°-CRI 93	26 W	BIANCO
22087839-09	CLD CELL-E	1,00	LED COB-2573lm-3000K-18°-CRI 93	0 W	NERO
22087839-1241	CLD CELL-D-D	1,00		0 W	NERO
22087839-68	CLD CELL	1,00	LED COB-2754lm-4000K-18°-CRI 93	0 W	NERO
22087839-6809	CLD CELL-E	1,00	LED COB-2754lm-4000K-18°-CRI 93	0 W	NERO
22087839-6841	CLD CELL-D-D	1,00	LED COB-2754lm-4000K-18°-CRI 93	0 W	NERO
22088930-00	CLD CELL	1,00	LED COB-2440lm-3000K-35°-CRI 93	0 W	NERO
22088930-09	CLD CELL-E	1,00	LED COB-2440lm-3000K-35°-CRI 93	0 W	NERO
22088930-1241	CLD CELL-D-D	1,00	LED COB-2440lm-3000K-35°-CRI 93	0 W	NERO
2288930-68	CLD CELL	1,00	LED COB-2610lm-4000K-35°-CRI 93	0 W	NERO
22088930-6809	CLD CELL-E	1,00	LED COB-2610lm-4000K-35°-CRI 93	0 W	NERO
22088930-6841	CLD CELL-D-D	1,00	LED COB-2610lm-4000K-35°-CRI 93	0 W	NERO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated