

Trimless 70 - A1

Corps : en aluminium moulé sous pression avec projecteurs orientables et inclinables. Equipement : équipés d'étriers en acier galvanisé qui assurent une adhérence parfaite aux faux-plafonds d'épaisseur comprise entre 12 mm et 25 mm. Réflecteur : en polycarbonate métallisé haut rendement. Normes: produits conformes aux normes EN 60598-1 CEI 34-21. Indice de protection conforme aux normes EN 60529.

LED: Sources lumineuses haute efficacité (CRI 90).

Facteur de puissance: $\geq 0,95$

Groupe de risque photobiologique : Groupe 0 (exempt de risque).

Maintien du flux lumineux à 80%: 50.000h (L80B20).

encastrée Ø 130x130mm


Download

DXF 2D

- trim70a1.dxf

Montaggi

- TRIMLESS A 50-70-111 rev5.pdf

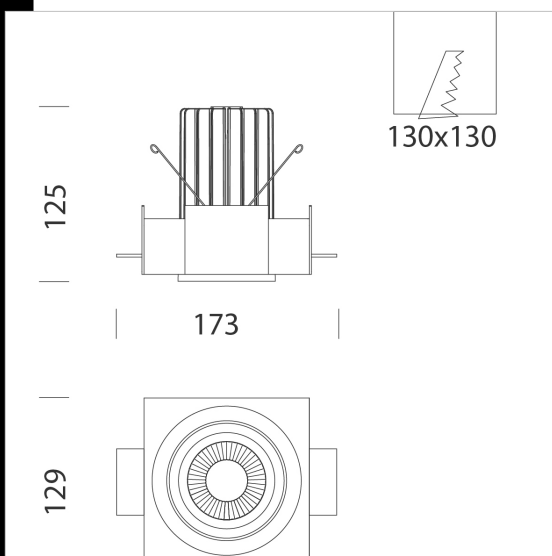

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22107130-00	CLD	1,10	LED COB-2160lm-3000K-21°-CRI 90	25 W	NOIR
22107130-1241	CLD-D-D	1,10	LED COB-2160lm-3000K-21°-CRI 90	25 W	NOIR
22107131-00	CLD	1,70	LED COB-2225lm-4000K-21°-CRI 90	25 W	NOIR
22107131-1241	CLD-D-D	1,70	LED COB-2225lm-4000K-21°-CRI 90	25 W	NOIR
22107132-00	CLD	1,10	LED COB-2376lm-3000K-28°-CRI 90	25 W	NOIR
22107132-1241	CLD-D-D	1,09	LED COB-2376lm-3000K-28°-CRI 90	25 W	NOIR
22107133-00	CLD	1,10	LED COB-2448lm-4000K-28°-CRI 90	25 W	NOIR
22107133-1241	CLD-D-D	1,70	LED COB-2448lm-4000K-28°-CRI 90	25 W	NOIR
22107134-00	CLD	1,10	LED COB-2103lm-3000K-40°-CRI 90	25 W	NOIR
22107134-1241	CLD-D-D	1,70	LED COB-2103lm-3000K-40°-CRI 90	25 W	NOIR
22107135-00	CLD	1,10	LED COB-2262lm-4000K-40°-CRI 90	25 W	NOIR
22107135-1241	CLD-D-D	1,70	LED COB-2262lm-4000K-40°-CRI 90	25 W	NOIR

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated