

## PanelTech - PUSH DALI - UGR<19


Cadre : en aluminium. Plaque intérieure: en PMMA. Diffuseur : technopolymère extrudé prismatique haute transmittance. Règlement: Produit conforme aux normes EN60598-1 CEI 34-21 normes. Installable sur surfaces normalement inflammablesL Groupe de risque photobiologique: Groupe 0 (exempt de risque)

Facteur de puissance: 0.95  
Durée de vie 50000h 80% L80B20

### Download

DXF 2D  
- pantecha.dxf

BIM  
- PanelTech PUSH DALI - UGR19 - 20200224.zip

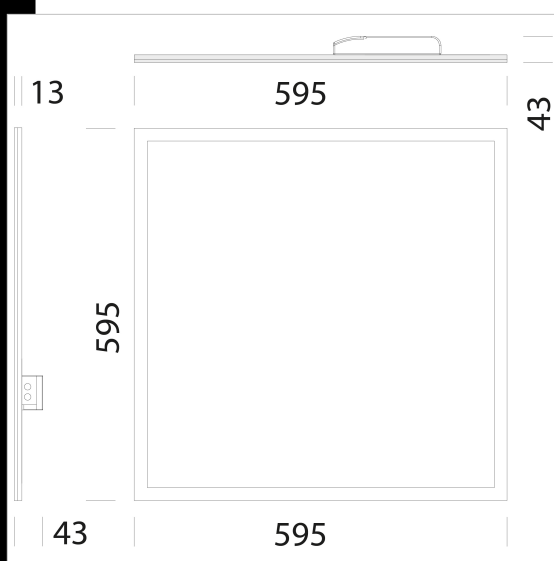

| Code          | Gear           | Kg   | Lumen Output-K-CRI      | WTot | Colour |
|---------------|----------------|------|-------------------------|------|--------|
| 22184810-1245 | CLD-D-D        | 4,01 | LED-3527lm-4000K-CRI 80 | 34 W | BLANC  |
| 22184811-1245 | CLD-D-D        | 4,05 | LED-3353lm-3000K-CRI 80 | 34 W | BLANC  |
| 22184810-0945 | CLD CELL-E     | 4,30 | LED-3527lm-4000K-CRI 80 | 35 W | BLANC  |
| 22184811-0945 | CLD CELL-E     | 4,30 | LED-3353lm-3000K-CRI 80 | 35 W | BLANC  |
| 22184810-3145 | CLD CELL-D-D-E | 3,22 | LED-3527lm-4000K-CRI 80 | 35 W | BLANC  |
| 22184811-3145 | CLD CELL-E     | 4,60 | LED-3353lm-3000K-CRI 80 | 35 W | BLANC  |

### Accessori



- Recessed springs



- Cadre 600x600



- Cadre - 600x600



- Cadre - 600x600

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated