




3500 Argon 3.5

Corps : aluminium moulé sous pression avec ailettes de refroidissement incorporées dans le cache. Diffuseur : verre trempé transparent épaisseur 4 mm résistant au choc thermique et au choc mécanique. Équipement : avec connectique rapide. LED: facteur de puissance : 0,9. Maintien du flux lumineux à 80%: 50.000h (L80B20). Groupe de risque photobiologique: groupe 0 (exempt de risque).

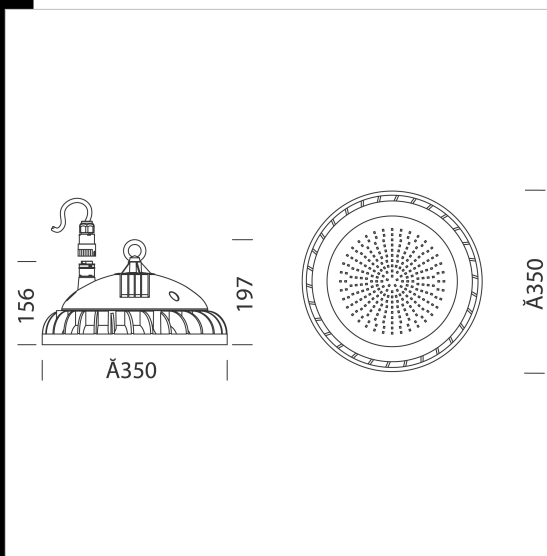

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22350030-00	CLD CELL	6,40	LED-13000lm-4000K-CRI 80	100 W	GRAPHITE
22350031-00	CLD CELL	6,35	LED-19500lm-4000K-CRI 80	150 W	GRAPHITE
22350032-00	CLD CELL	6,79	LED-26000lm-4000K-CRI 80	200 W	GRAPHITE
22350030-0034	CLD CELL	8,10	LED-13000lm-5000K-CRI 80	100 W	GRAPHITE
22350031-0034	CLD CELL	6,26	LED-19500lm-5000K-CRI 80	150 W	GRAPHITE
22350032-0034	CLD CELL	6,69	LED-26000lm-5000K-CRI 80	200 W	GRAPHITE

Accessori



- Bracket - Argon 3.5



- Reflector UGR<25 - Argon 3.5



- Bracket with EM box 1h - Argon 3.5

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated