




Download

DXF 2D
- 703610.dxf

Montaggi
- VISION 2.0 rev8.pdf

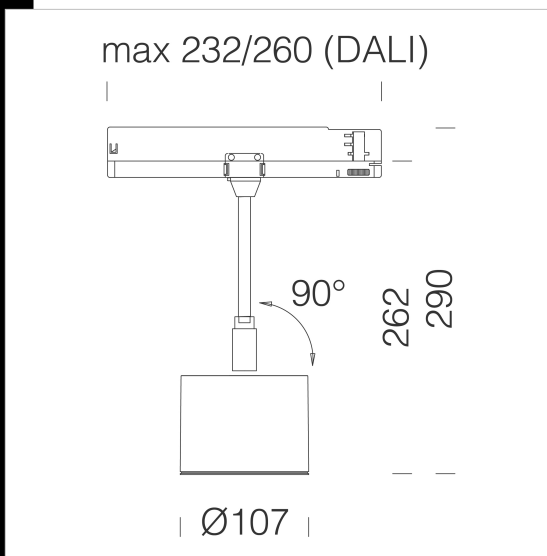

Vision 2.0 small - tiges - adaptateur universel

Corps: en aluminium moulé sous pression avec trous de refroidissement.
 Reflecteur: en aluminium, moulé sous pression, de haute rendement et anti-reflets.

Peinture: pulvérisation avec peinture polyester résistant aux rayons UV.

Normes: appareils conformes aux normes EN 60598-1 CEI 34-21 Indice de protection conforme aux normes EN 60529.

Maintien du flux lumineux à 80%: 50.000h (L80B20).

Facteur de puissance >0,95

Groupe de risque photobiologique: Groupe 0 (exempt de risque)

design: A.Pedretti (Studio Rota & partner)

Version gradable DALI -1241 -6841 pour une utilisation avec le rail OMNITRACK PLUS.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22703610-00	CLD	1,00	LED COB-3631lm-3000K-44°-CRI>90	33 W	BLANC
22703630-00	CLD	0,69	LED COB-3631lm-3000K-44°-CRI>90	33 W	NOIR
22703670-00	CLD	0,69	LED COB-3631lm-3000K-44°-CRI>90	33 W	ARGENT
22703610-68	CLD	0,69	LED COB-3885lm-4000K-44°-CRI>90	33 W	BLANC
22703630-68	CLD	0,69	LED COB-3885lm-4000K-44°-CRI>90	33 W	NOIR
22703670-68	CLD	0,69	LED COB-3885lm-4000K-44°-CRI>90	33 W	ARGENT

Accessori



- Écran alvéolaire



- Acc. encastré



- Acc. patère pour adaptateurs universel et DIMM DIMM 1/10V-DALI

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W_{tot} column indicates the total wattage absorbed by the system without exceeding 10% of the indicated