




Download


DXF 2D
- 703810.dxf

Montaggi
- VISION 2.0 rev8.pdf

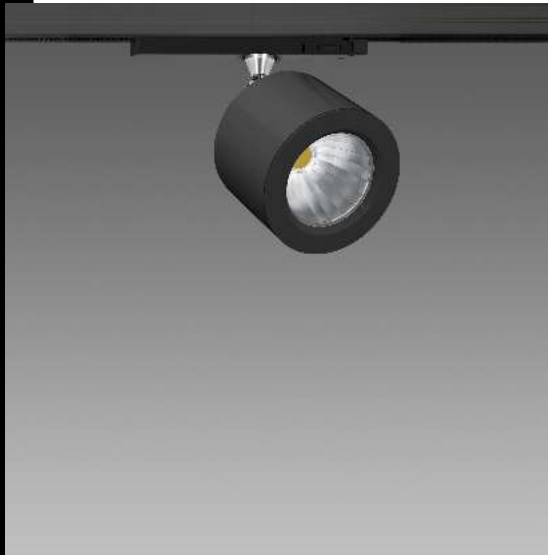

Vision 2.0 small - tiges - court - adaptateur universel

Corps: en aluminium moulé sous pression avec trous de refroidissement.
 Reflecteur: en aluminium, moulé sous pression, de haute rendement et anti-reflets.
 Peinture: pulvérisation avec peinture polyester résistant aux rayons UV.
 Normes: appareils conformes aux normes EN 60598-1 CEI 34-21 Indice de protection conforme aux normes EN 60529.
 Maintien du flux lumineux à 80%: 50.000h (L80B20).
 Facteur de puissance >0,95
 Groupe de risque photobiologique: Groupe 0 (exempt de risque)
 design: A.Pedretti (Studio Rota & partner)
 Version gradable DALI -1241 -6841 pour une utilisation avec le rail OMNITRACK PLUS.

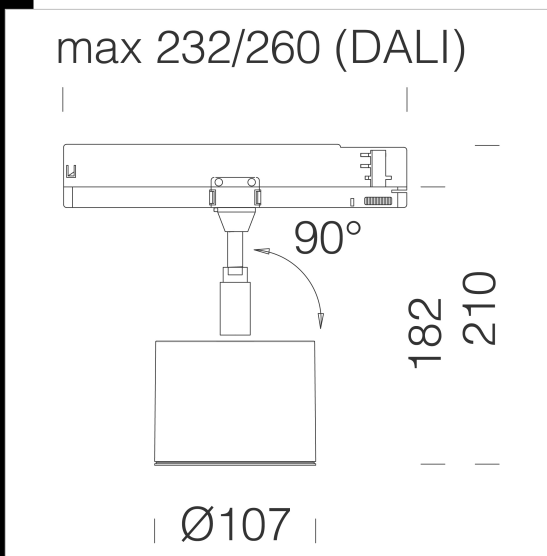

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22703810-00	CLD	0,90	LED COB-3631lm-3000K-44°-CRI>90	33 W	BLANC
22703830-00	CLD	0,69	LED COB-3631lm-3000K-44°-CRI>90	33 W	NOIR
22703870-00	CLD	1,00	LED COB-3631lm-3000K-44°-CRI>90	33 W	ARGENT
22703810-68	CLD	0,90	LED COB-3885lm-4000K-44°-CRI>90	33 W	BLANC
22703830-68	CLD	0,69	LED COB-3885lm-4000K-44°-CRI>90	33 W	NOIR
22703870-68	CLD	1,00	LED COB-3885lm-4000K-44°-CRI>90	33 W	ARGENT

Accessori



- Écran alvéolaire



- Acc. encastré



- Acc. patère pour adaptateurs universel et DIMM DIMM 1/10V-DALI

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W_{tot} column indicates the total wattage absorbed by the system without exceeding 10% of the indicated