



**Download**

 Montaggi  
 - 99767300411041.pdf

**Type 2 - Driver IP66 - DALI**

-complete with quick connector -ambient temperature: -40°C + 50°C • input voltage AC: 220-400V -frequency: 50/60Hz -power factor: 0.95 -Low Flicker &lt;3%

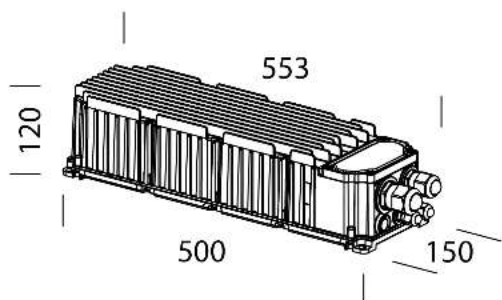

| Code            | Gear         | Kg   | Lumen-K-CRI | WTot | Colour |
|-----------------|--------------|------|-------------|------|--------|
| 997673-00411041 | CLD CELL-D-D | 9,00 | 1200mA---   | 0 W  | GRIS   |
| 997673-08411041 | CLD CELL-D-D | 9,00 | 1300mA---   | 0 W  | GRIS   |

**Prodotti**


- 3196 Forum LED - 3 modules -



- 3198 Forum LED - 3 modules -



- 3192 Forum LED - 3 modules -



- 3195 Forum LED - 3 modules -



- 3231 Forum LED - 3 modules - symétrique M



- 3230 Forum LED - 3 modules - symétrique MS



- 3232 Forum LED - 3 modules - symétrique XW



- 3194 Forum LED - 3 modules - asymétrique 60°

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated