


620 - Safety Flag LED

Corpo: In tecnopolimero
 Riflettore: In plexiglass trasparente con micro finitura studiata per avere la massima uniformità in termini di luminanza.
 Dotazione: Completo di accessori per il fissaggio a parete, plafone e sospensione.
 Equipaggiamento: Con tre ingressi cavi e stringicavi di sicurezza.
 Versioni:
 o Autonomia 1h e ricarica in 12h.
 o Autonomia 3h e ricarica in 24h
 A richiesta: con autodiagnosi integrata
 NORMATIVA: Prodotti in conformità alle norme EN60598 - CEI 34 - 21. Hanno grado di protezione secondo le norme EN60529.

Download

- DXF 2D
- 620flag.dxf
- Montaggi
- safety flag.pdf
- BIM
- 620 - Safety Flag LED - Wall mounting - 20200528.zip
- 620 - Safety Flag LED - Suspension - 20200528.zip

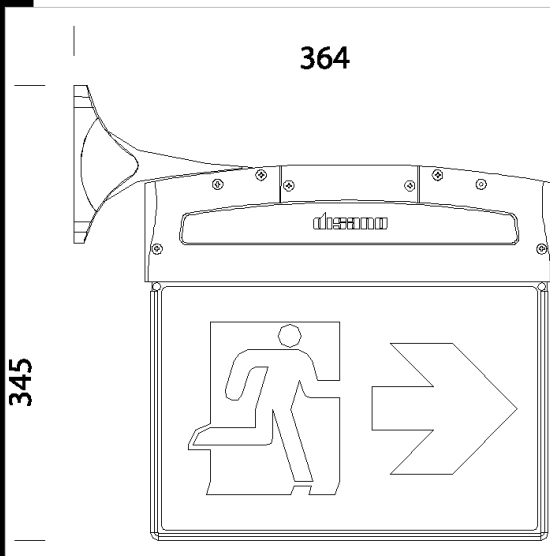

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
112581-00	CLD CEM-L	0,71	LED--6000K-	5 W	GRIGIO
112582-00	CLD CEM-L	0,83	LED--6000K-	5 W	GRIGIO

Accessori



- 470 etichette

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated