



Download

DXF 2D
- d6020.dxf

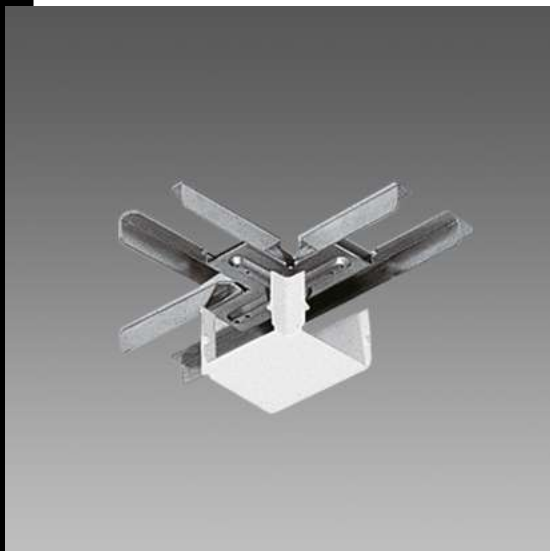

6020 Giunto a T

In acciaio zincato, con copertura in materiale termoplastico bianco. Per la giunzione di 3 canali. Da utilizzarsi in abbinamento all'acc. 6622.

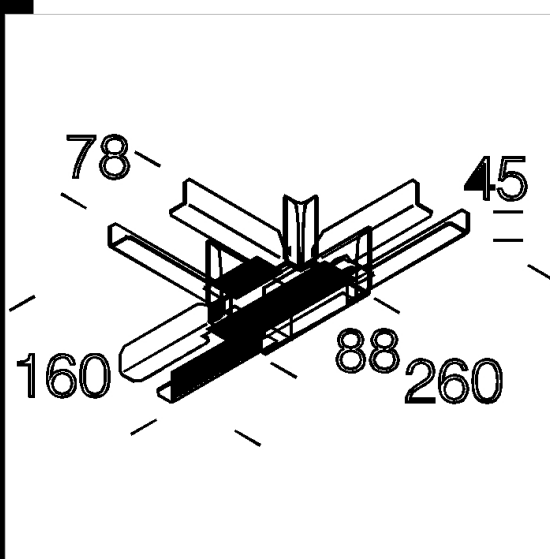

Code	Kg	WTot	Colour
132904-00	0,32	0 W	BIANCO

Prodotti



- 6000 Rapid System - canale



- 6502 Rapid system -



- 6402 Rapid system -



- 6600 Techno System -



- 6601 Techno System -
asimmetrico 25° - CRI 90



- 6602 Techno System - bi-
asimmetrico 25° - CRI 90



- 6603 Techno System - ellittica
30°x80° - CRI 90



- 6604 Techno System -
diffusore 60° - CRI 90



- 6605 Techno System -
diffusore semisferico diffusore
- CRI 90



- 6600 Techno System -
simmetrico 90° - CRI 80



- 6601 Techno System -
asimmetrico 25° - CRI 80



- 6602 Techno System - bi-
asimmetrico 25° - CRI 80



- 6603 Techno System - ellittica
30°x80° - CRI 80



- 6606 Techno System HE -
UGR - CRI 80



- 6611 Techno System HE -
simmetrico 90° - CRI 80



- 6615 Techno System HE -
diffusore 60° - CRI 80



- 6614 Techno System HE -



- 6612 Techno System HE -



- 6613 Techno System HE - bi-



- 6616 Techno System HE -
diffusore semisferico diffusore



- 6617 Techno System HE -
simmetrico Opale 90° - CRI 80

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated