


Attacco a sospensione semplice

Cavetto in acciaio (l=1,5m) con dispositivo per regolazione millimetrica. Carico max: kg 20.

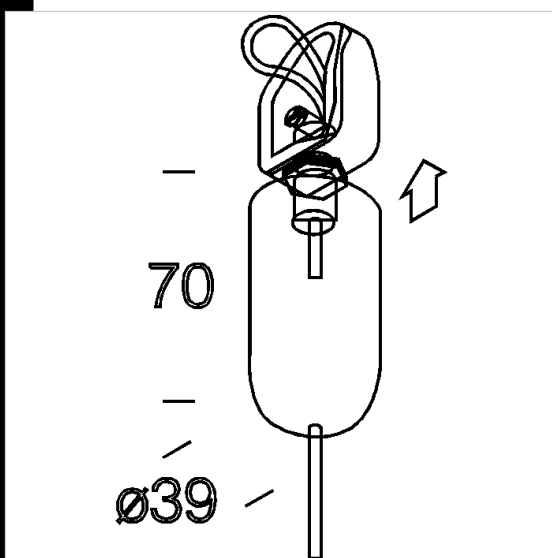

| Code | Kg | WTot | Colour |
|-------------|------|------|--------|
| 22003186-00 | 0,09 | 0 W | BIANCO |
| 22003106-00 | 0,09 | 0 W | NERO |

Prodotti



- Omnitrack 3 accensioni



- Omnitrack PLUS - DIMM - 6



- Gi Otto 4 x ar111 Sospensione



- Struttura per Omnitrack

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated