



## Sospensione elettrificata 3/5 poli

22003173-00 Completa di cavetto in acciaio con dispositivo per regolazione millimetrica e cavo di alimentazione. Carico max.: 20Kg. Lunghezza cm 100.  
 22003178-00 Completa di cavetto in acciaio con dispositivo per regolazione millimetrica e cavo di alimentazione. Carico max.: 20Kg. Lunghezza cm 100.  
 Cavo di alim. 5 poli per cablaggio EM e DIMM.

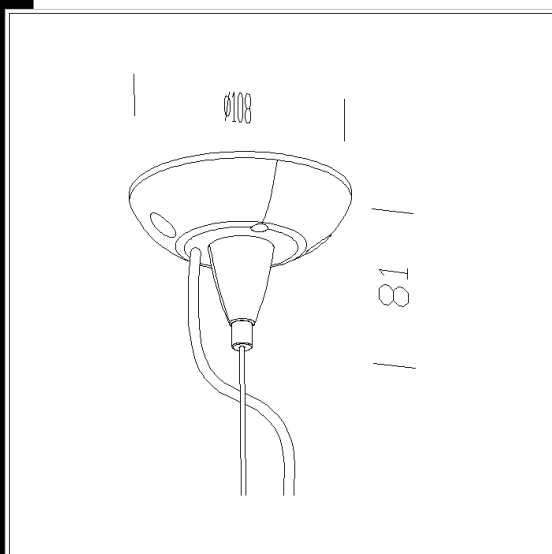

Code	Kg	WTot	Colour
22003173-00	0,28	0 W	ARGENTO
22003178-00	0,28	0 W	ARGENTO
22003113-00	0,29	0 W	BIANCO

### Prodotti

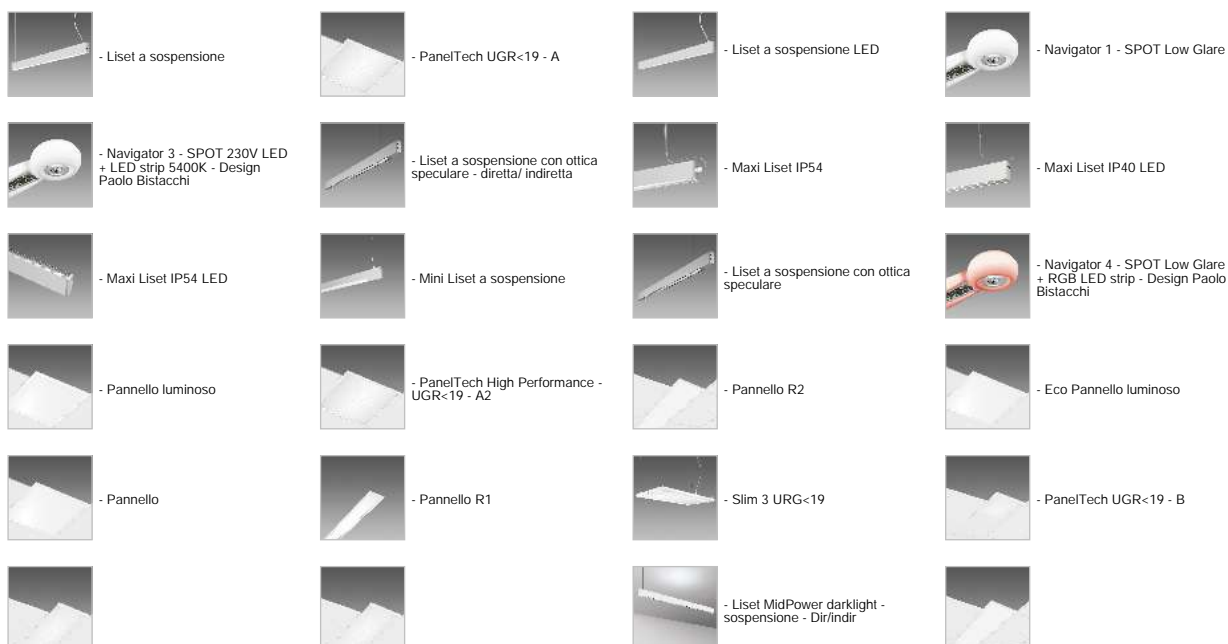



















Download  
 DXF 2D  
 - 3173.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

## Sospensione elettrificata 3/5 poli

### Prodotti

	- Sintesi System - a sospensione luce diretta/indiretta - diffondente		- Sintesi System - a sospensione con schermo UGR<19		- Sintesi System - a sospensione luce diretta/indiretta - con schermo UGR<19		- Sintesi System - a sospensione ottica Dark - UGR<19
	- Sintesi System - a sospensione luce diretta/indiretta - ottica Dark - UGR<19		- Sintesi System - a sospensione con schermo satinato - UGR<22		- Sintesi System - a sospensione luce diretta/indiretta - con schermo satinato - UGR<22		- Sintesi System - plafone asimmetrica 25° - UGR<22
	- Sintesi System - a sospensione luce diretta/indiretta - diffondente 60° - UGR<22		- Eco Pannello luminoso - CAM		- Eco Pannello luminoso R2 - CAM		- Eco Pannello luminoso R4
	- PanelTech High Performance - UGR<19 - A2 - CAM		- PanelTech High Performance - UGR<19 - R2 - CAM		- Sintesi System - a sospensione diffondente		- Maxi Liset IP40 - Tutta luce
	- PanelTech High Performance - UGR<19 - R2		- PanelTech High Performance UGR<19 - A				

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated