



Download

DXF 2D
- linled.dxf


Montaggi
- LINEA_LED_ARREDI rev5.pdf

BIM
- Linea LED arredi - 20200224.zip



Linea LED "arredi"

Linea LED "Arredi" in versione mini adatta per l'installazione in soffitti e superfici verticali completo di striscia LED.
Corpo: profilo in alluminio estruso con schermo in pc opalino.
Equipaggiamento: con molle a nastro (una molla ogni 500mm).
22010671-00 1210mm (Cut 1212x19mm)
22010672-00 1210mm (Cut 1212x19mm)
22010673-00 2410mm (Cut 2412x19mm)
22010670-00 2410mm (Cut 2412x19mm)

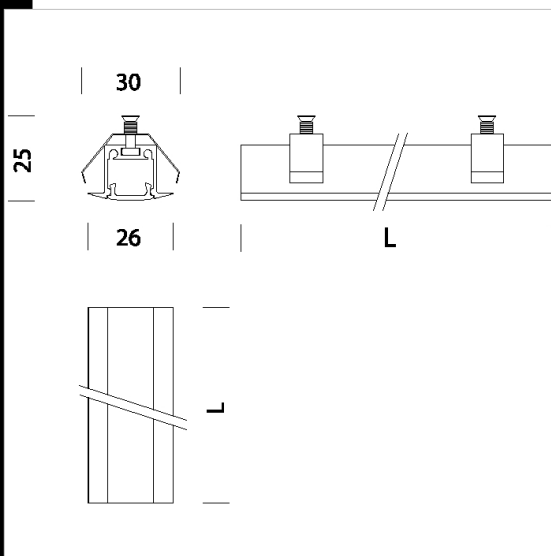

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010671-00	CLD S+L	0,36	LED-3000lm-3000K-CRI>90	32 W	OSSIDATO
22010672-00	CLD S+L	0,35	LED-3000lm-4000K-CRI>90	28 W	OSSIDATO
22010673-00	CLD S+L	0,52	LED-6000lm-3000K-CRI>90	63 W	OSSIDATO
22010670-00	CLD S+L	0,65	LED-6000lm-4000K-CRI>90	56 W	OSSIDATO

Accessori



- Testatina di chiusura - Linea



- Alimentatore IP20 - V in 100-



- Alimentatore IP20 DIMM DALI - V in 220-240V 0/50/60Hz - V out



- Alimentatore IP20 - V in 120-



- Alimentatore IP20 DIMM DALI - V in 220-240V 0/50/60Hz - V out 24V DC

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated