

CLD
S+L



Liset IP sessantacinque LED

Un segno essenziale, di ridotte dimensioni. Liset è un innovativo apparecchio studiato per utilizzare al meglio la tecnologia LED. La pulizia delle linee e l'efficienza luminosa permettono di ottenere straordinari effetti di luce e colore. Corpo: in alluminio estruso ossidato.

Diffusore: in policarbonato trasparente sp. 3mm.

Normativa: Prodotti in conformità alle norme EN 60598-1-CEI 34.21, hanno grado di protezione secondo le norme EN 60529.

LED: ad alta efficienza, Q4 colore "neutral white" 10°.

Fattore di potenza: >0,95

Mantenimento del flusso luminoso al 70%: 50000h (L70B50)

Classificazione rischio fotobiologico: Gruppo di rischio esente

Acquistare a parte alimentatore cod. 92036 / 92038.

Collegamento in serie max 3.6m del Liset ipsessantacinque


Download

DXF 2D

- ipsessantacinqueled.dxf
- ipsessantacinqueled.dxf

Montaggi

- ip65_2.dxf
- LISET_IP65.pdf

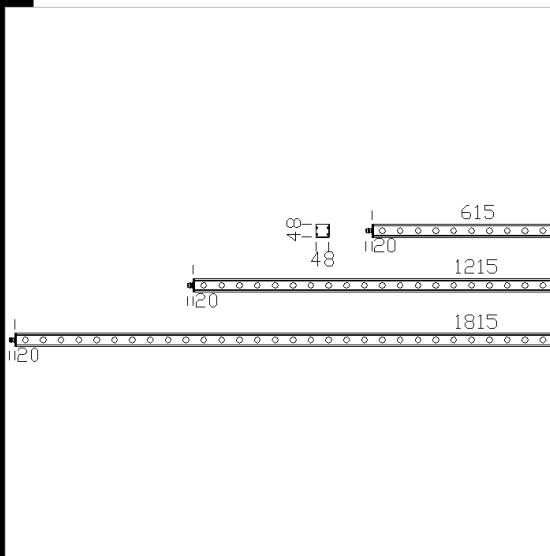

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22017079-00	CLD S+L	3,70	LED-105lm-4100K-	12 W	OSSIDATO
22017078-00	CLD S+L	1,50	LED-105lm-4100k-	9 W	OSSIDATO
22017071-00	CLD S+L	1,10	LED-105lm-4100k-	11 W	OSSIDATO
22017073-00	CLD S+L	3,00	LED 30x1.1W white-105lm-4100K-	33 W	OSSIDATO
22017076-00	CLD S+L	2,95	LED-105lm-4100K-	19 W	OSSIDATO
22017075-00	CLD S+L	1,50	LED-105lm-4100K-	13 W	OSSIDATO
22017072-00	CLD S+L	2,55	LED 20x1.1W white-105lm-4100k-	22 W	OSSIDATO
22017077-00	CLD S+L	1,50	LED-105lm-4100K-	4 W	OSSIDATO
22017074-00	CLD S+L	1,50	LED-105lm--	7 W	OSSIDATO

Accessori



- Sospensione semplice



- Driver IP20-IP65-IP67 LED - 24V



- Staffa fissa - Liset IP65



- Attacco a sospensione - Liset IP65



- Attacco a plafone - Liset IP65



- Staffa orientabile - Liset IP65

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated