


IP40

3° IP
IK


Download

DXF 2D
- 25515.dxf

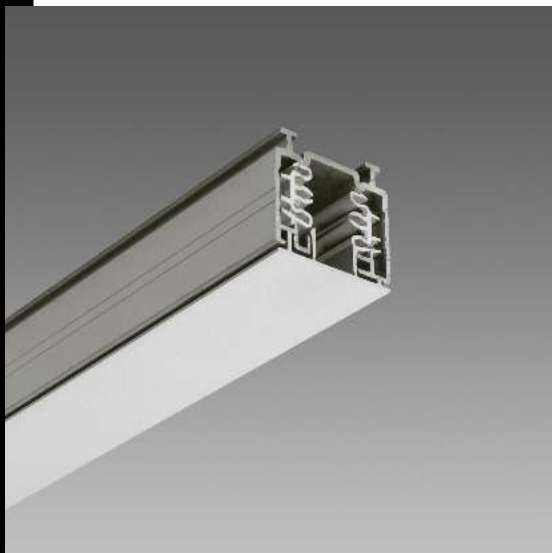

Copertura Ominitrack

Permette la copertura della struttura nella parte inferiore

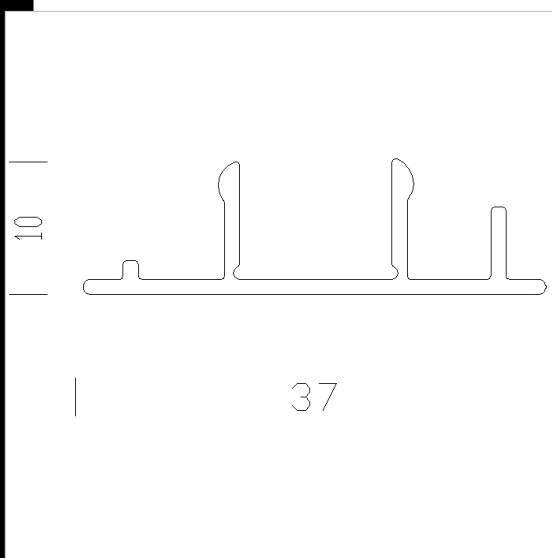

| Code | Kg | WTot | Colour |
|-------------|------|------|----------|
| 22025515-00 | 0,11 | 0 W | BIANCO |
| 22025533-00 | 0,11 | 0 W | NERO |
| 22025572-00 | 0,11 | 0 W | OSSIDATO |

Prodotti



- Omnitrack 3 accensioni

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated