


Cassetta - microliset indoor

Download

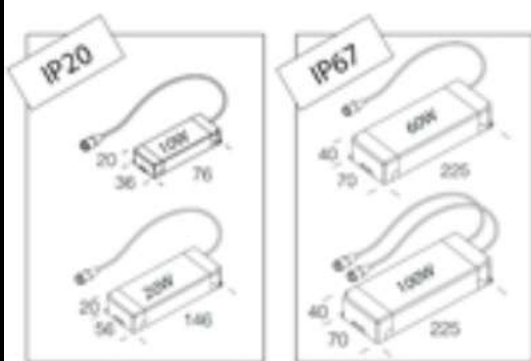

acc. 22090711-00 (MAX 10W) 1 uscita max 2 microliset 0.3m - 1 microliset 0.5m
 acc. 22090712-00 (MAX 20W) 1 uscita max 5 microliset 0.3m - 3 microliset 0.5m - 1 microliset 1m - 1 microliset 1.5m
 acc. 22090720 (MAX 60W) 1 uscita max 15 microliset 0.3m - 10 microliset 0.5m - 5 microliset 1m - 3 microliset 1.5m
 acc. 22090721 (MAX 100W IP67) 2 uscite max 25 microliset 0.3m - 15 microliset 0.5m - 8 microliset 1m - 5 microliset 1.5m (Installazione in fila continua con cod. 22090721-00 / 100W: è possibile collegare un numero di Micro Liset che non superi la lunghezza massima di 5m sulla prima uscita, rispettando il totale indicato in tabella per 2 uscite.)

Code	Gear	Kg	Lumen-K-CRI	WTot
22090720-00	CLD	0,40	60W---	0 W
22090721-00	CLD	0,45	100---	0 W
22090711-00	CLD	0,09	10W---	0 W
22090712-00	CLD	0,16	20w---	0 W

Prodotti



- Microliset 2 - indoor angle



- Microliset 1 - indoor flat

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated