

Office 1 Matt

Famiglia di apparecchi studiati per unire un elevato risparmio energetico ad un'ottima qualità della luce emessa, per rispondere alle varie esigenze di sicurezza e manutenzione. Il design dell'apparecchio è estremamente semplice e funzionale. Serie conforme alla norma europea EN12464 per quanto riguarda l'installazione in ambienti con videoterminali.

Corpo: In policarbonato infrangibile ed autoestinguento V2, stabilizzato ai raggi UV, antiingiallimento.

Riflettore: In policarbonato, autoestinguento V2, satinato con polveri di alluminio, in alto vuoto con procedimento di C.V.D. per un maggior controllo e rendimento della luce.


Equipaggiamento: Completo di staffa regolabile in acciaio che assicurano una perfetta aderenza al controsoffitto di spessore da 1mm a 20mm.

Normativa: Prodotto in conformità alle vigenti norme EN60598-1 CEI 34-21. Hanno grado di protezione secondo le norme EN 60529.


Mantenimento del flusso luminoso al 80%: 50.000h (L80B20).

Fattore di potenza: >0,95

Classificazione rischio fotobiologico: Gruppo di rischio esente

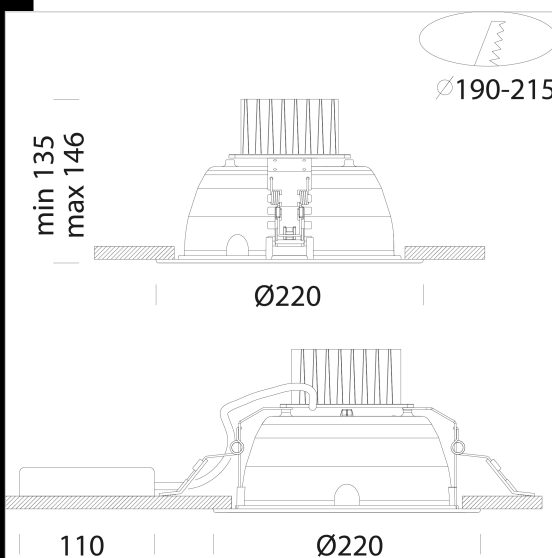

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152414-00	CLD CELL	1,10	LED COB-2488lm-4000K-CRI 92	19 W	ARGENTO
22152410-00	CLD CELL	1,10	LED COB-3172lm-4000K-CRI 92	25 W	ARGENTO
22152961-68	CLD CELL	1,10	LED COB-3479lm-4000K-CRI 92	32 W	ARGENTO
22152417-00	CLD CELL	1,25	LED COB-4804lm-4000K-CRI 92	39 W	ARGENTO
22152411-68	CLD CELL	0,95	LED COB-4230lm-4000K-CRI 92	39 W	ARGENTO
22152960-00	CLD CELL	1,90	LED COB-6734lm-4000K-CRI 92	69 W	ARGENTO
22152415-00	CLD CELL	1,10	LED COB-2197lm-3000K-CRI 92	18 W	ARGENTO
22152413-00	CLD CELL	1,10	LED COB-3084lm-3000K-CRI 92	26 W	ARGENTO
22152961-00	CLD CELL	1,60	LED 3000-3251lm-3000K-CRI 92	32 W	ARGENTO
22152416-00	CLD CELL	1,20	LED COB-4674lm-3000K-CRI 92	39 W	ARGENTO
22152411-00	CLD CELL	1,05	LED COB-3954lm-3000K-CRI 92	39 W	ARGENTO
22152960-39	CLD CELL	1,49	LED COB-6263lm-3000K-CRI 92	69 W	ARGENTO
22152412-00	CLD CELL	1,15	LED COB-3248lm-3500K-CRI 92	35 W	ARGENTO
22152414-1241	CLD CELL-D-D	1,10	LED COB-2488lm-4000K-CRI 92	19 W	ARGENTO
22152410-1241	CLD CELL-D-D	1,25	LED COB-3172lm-4000K-CRI 92	25 W	ARGENTO
22152961-6841	CLD CELL-D-D	1,63	LED COB-3479lm-4000K-CRI 92	32 W	ARGENTO
22152417-1241	CLD CELL-D-D	1,10	LED COB-4804lm-4000K-CRI 92	39 W	ARGENTO
22152411-6841	CLD CELL-D-D	1,10	LED COB-4230lm-4000K-CRI 92	39 W	ARGENTO
22152960-1241	CLD CELL-D-D	1,90	LED COB-6734lm-4000K-CRI 92	65 W	ARGENTO
22152415-1241	CLD CELL-D-D	1,15	LED COB-2197lm-3000K-CRI 93	19 W	ARGENTO
22152413-1241	CLD CELL-D-D	1,25	LED COB-3084lm-3000K-CRI 93	27 W	ARGENTO
22152961-1241	CLD CELL-D-D	1,25	LED COB-3251lm-3000K-CRI 92	32 W	ARGENTO
22152416-1241	CLD CELL-D-D	1,08	LED COB-4674lm-3000K-CRI 92	40 W	ARGENTO
22152411-1241	CLD CELL-D-D	1,45	LED COB-3954lm-3000K-CRI 92	40 W	ARGENTO
22152960-3941	CLD CELL-D-D	1,41	LED COB-6263lm-3000K-CRI 92	65 W	ARGENTO
22152412-1241	CLD CELL-D-D	1,25	LED COB-3248lm-3500K-CRI 92	35 W	ARGENTO
22152414-09	CLD CELL-E	1,10	LED COB-2488lm-4000K-CRI 92	19 W	ARGENTO
22152410-09	CLD CELL-E	1,60	LED COB-3172lm-4000K-CRI 92	25 W	ARGENTO
22152961-6809	CLD CELL-E	1,60	LED COB-3479lm-4000K-CRI 92	32 W	ARGENTO
22152417-09	CLD CELL-E	1,54	LED COB-4804lm-4000K-CRI 92	40 W	ARGENTO
22152411-6809	CLD CELL-E	1,45	LED COB-4230lm-4000K-CRI 92	39 W	ARGENTO
22152960-09	CLD CELL-E	1,60	LED COB-6734lm-4000K-CRI 92	69 W	ARGENTO

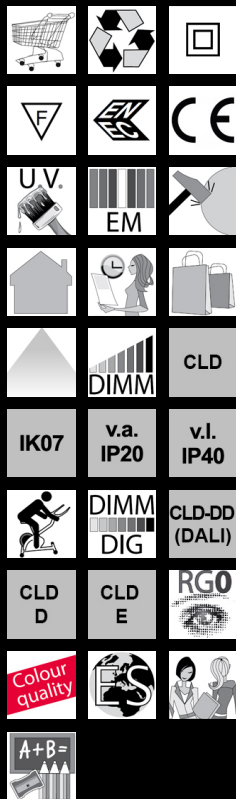

Download

DXF 2D

- off12.dxf

Montaggi

- OFFICE_1_rev5.pdf

BIM

- Office 1 Matt - 20200714.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Office 1 Matt

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152415-09	CLD CELL-E	1,45	LED COB-2197lm-3000K-CRI 92	18 W	ARGENTO
22152413-09	CLD CELL-E	1,45	LED COB-3084lm-3000K-CRI 92	26 W	ARGENTO
22152961-09	CLD CELL-E	1,45	LED COB-3251lm-3000K-CRI 92	32 W	ARGENTO
22152416-09	CLD CELL-E	1,45	LED COB-4674lm-3000K-CRI 92	40 W	ARGENTO
22152411-09	CLD CELL-E	1,60	LED COB-3954lm-3000K-CRI 92	40 W	ARGENTO
22152960-0928	CLD CELL-E	1,45	LED COB-6263lm-3000K-CRI 92	69 W	ARGENTO
22152412-09	CLD CELL-E	1,43	LED COB-3248lm-3500K-CRI 92	34 W	ARGENTO
22152414-31	CLD CELL-E	1,50	LED COB-2488lm-4000K-CRI 92	20 W	ARGENTO
22152410-31	CLD CELL-E	1,50	LED COB-3172lm-4000K-CRI 92	27 W	ARGENTO
22152961-3113	CLD CELL-E	1,50	LED COB-3479lm-4000K-CRI 92	32 W	ARGENTO
22152417-31	CLD CELL-E	1,50	LED COB-4804lm-4000K-CRI 92	40 W	ARGENTO
22152411-3113	CLD CELL-E	1,50	LED COB-4230lm-4000K-CRI 92	39 W	ARGENTO
22152960-31	CLD CELL-E	1,50	LED COB-6734lm-4000K-CRI 92	69 W	ARGENTO
22152415-31	CLD CELL-E	1,50	LED COB-2197lm-3000K-CRI 92	20 W	ARGENTO
22152413-31	CLD CELL-E	1,50	LED COB-3084lm-3000K-CRI 92	27 W	ARGENTO
22152961-31	CLD CELL-E	1,50	LED COB-3251lm-3000K-CRI 92	32 W	ARGENTO
22152416-31	CLD CELL-E	1,50	LED COB-4674lm-3000K-CRI 92	40 W	ARGENTO
22152411-31	CLD CELL-E	1,50	LED COB-3954lm-3000K-CRI 92	39 W	ARGENTO
22152960-3957	CLD CELL-E	2,19	LED COB-6263lm-3000K-CRI 92	69 W	ARGENTO
22152412-31	CLD CELL-E	1,50	LED COB-3248lm-3500K-CRI 92	35 W	ARGENTO

Accessori



- Diffusore serigrafato con foratura - office 1



- Diffusore serigrafato - office 1



- Diffusore serigrafato esterno - office 1



- Diffusore trasparente - office 1



- Diffusore serigrafato interno -



- Diffusore serigrafato interno -



- Sensore di presenza e

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated