



Download

DXF 2D
- cover3.dxf


Montaggi
- COVERLIGHT 1-2-3-4 rev0.pdf

BIM
- Cover light 3 LED - 20201005.zip



Cover light 3 LED

Corpo: In alluminio estruso.
Riflettore: Orientabile in lastra di policarbonato opalino satinato
LED: fattore di potenza: $\geq 0,95$
Mantenimento del flusso luminoso al 80%: $>50.000h$ (L80B20)

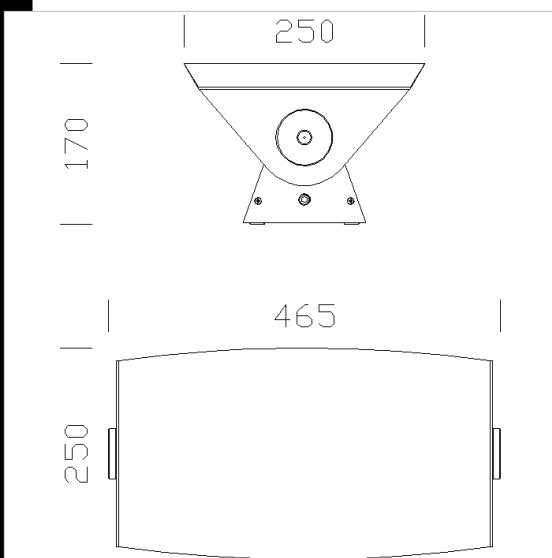

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22182273-00	CLD	1,53	LED-1134lm-3000K-CRI 80	15 W	ARGENTO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated