


Download

DXF 2D
- navig.dxf

3DS
- fosnova_navigator.3ds

3DM
- fosnova_navigator.3dm

Montaggi
- navigator.pdf

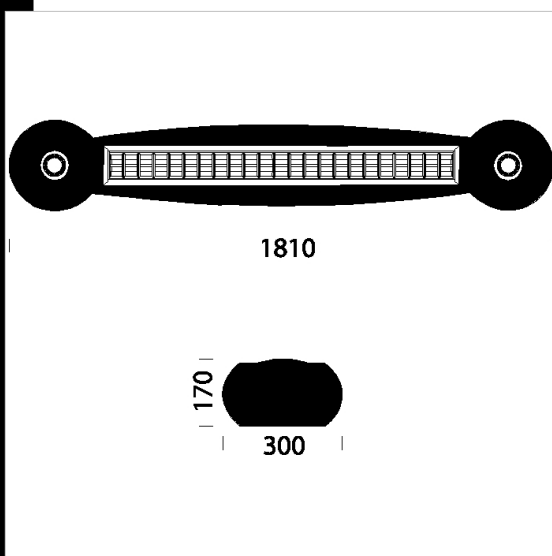

Navigator 3 - SPOT 230V LED + LED strip 5400K - Design Paolo Bistacchi

Corpo esterno: Realizzato in materiale plastico con diverse colorazioni anche semitrasparenti per versioni con LED e LED RGB.

Corpo interno: In lamiera di acciaio sp. 6/10 verniciato bianco con polvere poliestere, stabilizzato ai raggi UV. Bordo esterno in argento metallizzato.

Ottica: Darklight ad alveoli a doppia parabolicità longitudinale e trasversale in alluminio ad alta riflessione con trattamento multistrato PVD antiriflesso ed antiridescenza a bassissima luminanza.

Normativa: Prodotti in conformità alle norme EN60598-1 CEI 34/21. Hanno grado di protezione secondo le norme EN60529.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Base	Colour
22212214-12	CLD CELL	10,00	FL 1x54 + 2xLow Glare 7w---	197 W	G5+GU10	BIANCO
22212215-12	CLD CELL	11,00	FL 2x54 + 2xLow Glare 7w---	224 W	G5+GU10	BIANCO

Accessori



- Sospensione semplice



- Sospensione elettrificata 3/5

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated