



Download

DXF 2D
- stripip.dxf


Montaggi
- STRIP_LED_IP65-67 rev3.pdf



Strip - LED - IP65

Strisce a LED applicabili su superfici lisce, pulite ed asciutte con adesivo 3M. Evitare l'installazione su superfici spigolose e il danneggiamento delle componenti. Le strisce non devono essere tagliate per garantire il corretto funzionamento e il grado IP.

La versione 24V permette di diminuire la sezione del cavo elettrico ottenendo distanze maggiori. A richiesta: versione dimmerabile e DMX.
Lifetime: 25.000h

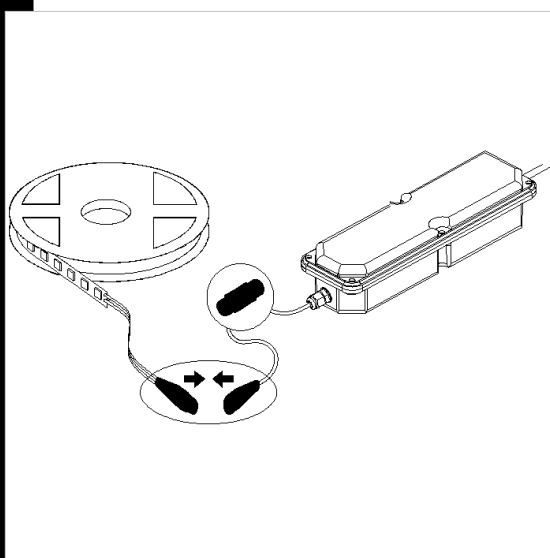

Code	Gear	Kg	Lumen Output-K-CRI	WTot
22485108-00	CLD S+L	0,18	LED strip 120LED/m-24V-1000lm/m-2700K-120°-	60 W
22485116-00	CLD S+L	0,30	LED strip 120LED/m-24V-1050lm/m-3000K-120°-	60 W
22485117-00	CLD S+L	0,15	LED strip 120LED/m-24V-1200lm/m-4000K-120°-	60 W
22485109-00	CLD S+L	0,31	LED strip 120LED/m-24V-1200lm/m-6500K-120°-	60 W

Accessori



- Connettore con cavo - Strip



- Driver IP20-IP65-IP67 LED -

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated