


1490 Palo Virgola

Pali in acciaio conico. Predisposto con foro per ingresso cavo di alimentazione, con attacco a frusta $\varnothing 60$. Per la versione con base è necessario acquistare 4 tirafondi da interrare, bulloneria e tappi.

Attenzione quando si utilizzano apparecchi in classe di isolamento I prevede le connessioni per la messa a terra.

N.B.: La possibilità di accoppiare una composizione al palo è subordinata alla verifica della resistenza alla spinta del vento, nelle zone del territorio previste dalla norma D.M.14/01/2008. Secondo le ipotesi di carico previste dalle norme EN 40-3-1.

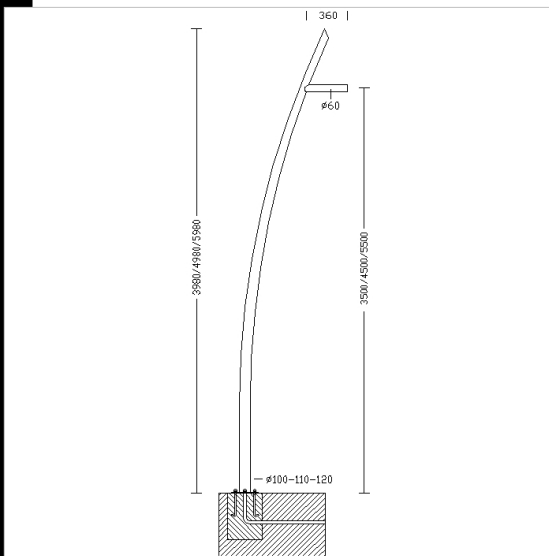

Code	Kg	Colour	Dimension	Aboveground	Underground
425080-00	38,00	GREY	3500x0x0 $\varnothing 0$	3500	
425081-00	41,00	GREY	4500x0x0 $\varnothing 0$	4500	
425082-00	60,00	GREY	5500x0x0 $\varnothing 0$	5500	

Accessori



- 299 Tirafondi



- 295 tirafondi - Solo Francia

Prodotti



- 3223 Sforza LED a frusta - asimmetrico



- 3227 Sforza LED a frusta



- 3277 Mini Stelvio FX T2 - stradale




- 3269 Mini Stelvio FX T5 - diffusore



- 3375 Mini Stelvio - high performance - stradale



- 3376 Mini Stelvio - high performance - grandi aree



Download

DXF 2D
- 1490.dxf

Montaggi
- 1490 10-19.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated