




### 1411 Palo rastremato singolo da interrare

Palo in acciaio zincato a caldo e verniciato in polvere di poliestirene termoidurente. Base, finestra di ispezione e decori stampati in alluminio pressofuso e successivamente verniciati. Con finestra di ispezione, completa di 2 portafusibili di protezione, 2 fusibili da 16A, morsiettera asportabile. Viteria in acciaio inox.

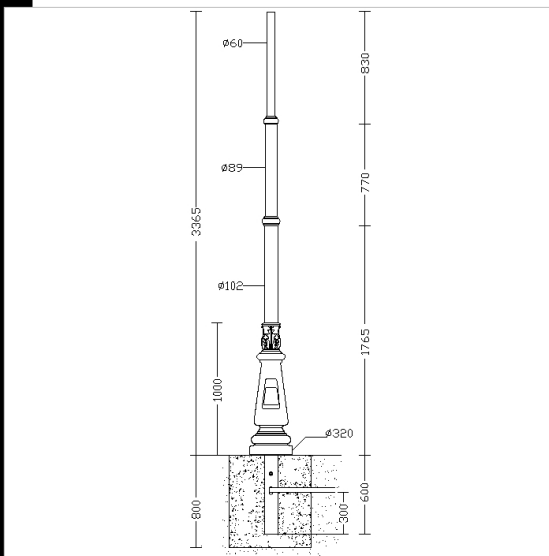

Code	Kg	Colour	Dimension	Aboveground	Underground
425230-00	0,00	ANTRACITE	3965x0x0 Ø0	3365	600

#### Prodotti



- 3203 Lucerna Q3 con diffusore



- 3210 Lucerna R1



- 3213 Lucerna R3 con diffusore



- 3212 Lucerna R LED



- 3200 Lucerna Q1




- 3209 Lucerna Q8 LED asimmetrico



- 3214 Lucerna LED



- 3202 Lucerna Q2 LED COB

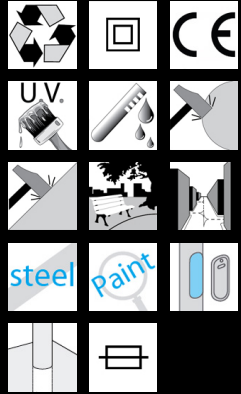

#### Download

DXF 2D  
- 1411.dxf

3DS  
- disano\_1411\_lucerna.3ds  
- disano\_1411\_lucerna\_simple.3ds

3DM  
- disano\_1411\_lucerna.3dm  
- disano\_1411\_lucerna\_simple.3dm

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated