

Download

DXF 2D
- 1305_6.dxf




1306 Globo nero

GLOBI: In policarbonato infrangibile ed autoestinguento V2, stabilizzato ai raggi UV, antingiallimento, stampati ad iniezione con un procedimento di soffiaggio. Caratterizzati da un'ottima trasparenza che consente la trasmissione ideale del flusso luminoso.

NORMATIVA: Prodotti in conformità alle vigenti norme EN60598-1 CEI 34-21, sono protetti con il grado IP65IK08 (basi+globi) secondo le norme EN60529.

Da utilizzare con la base acc. 1330 e con lamellare acc. 1328 ø400= max 70W - ø500=max 100W.

Su richiesta versione con interno verniciato nero e con lamellare speciale per legge Regione Lombardia

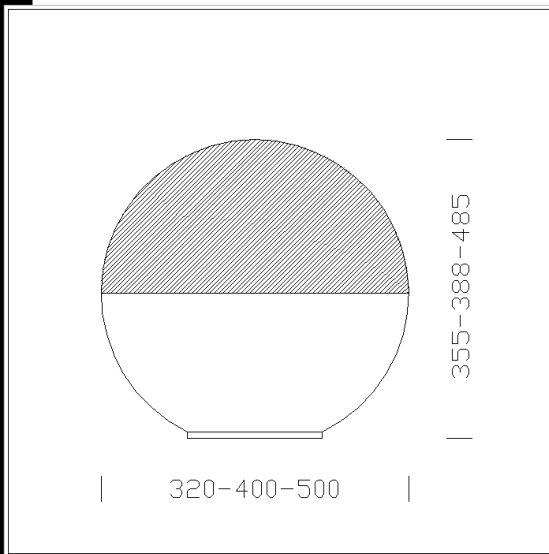

Code	Kg	WTot	Colour
425635-00	2,46	0 W	NERO
425636-00	1,40	0 W	NERO

Accessori



- 1326 Attacco plafone lungo



- 1324 Attacco a sospensione



- 1327 lamellare zona 2



- 1328 lamellare zona 3

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated