

**Download**

DXF 2D  
- acc 1331\_1332.dxf

**1331 Globo argento liscio**




GLOBI: In policarbonato infrangibile ed autoestingente V2, stabilizzato ai raggi UV, antingiallimento, stampati ad iniezione con un procedimento di soffiaggio. Caratterizzati da un'ottima trasparenza che consente la trasmissione ideale del flusso luminoso.

NORMATIVA: Prodotti in conformità alle vigenti norme EN60598-1 CEI 34-21, sono protetti con il grado IP65IK08 (basi+globi) secondo le norme EN60529.

Da utilizzare con la base acc. 1313 e con lamellare acc. 1329.  $\phi 400 = \text{max } 70W$  -  $\phi 500 = \text{max } 100W$ .

Su richiesta versione con interno verniciato nero e con lamellare speciale per legge Regione Lombardia

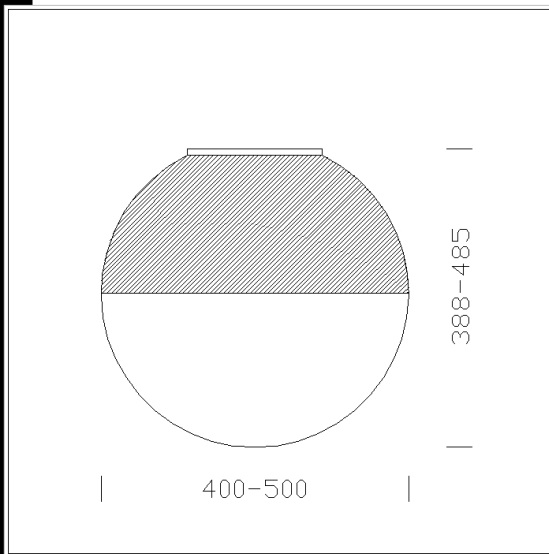

Code	Kg	WTot	Colour
425640-00	1,49	0 W	ARGENTO SABBBIATO
425641-00	3,60	0 W	ARGENTO SABBBIATO

**Accessori**



- 1329 lamellare zona 2



- 1326 Attacco plafone lungo



- 1324 Attacco a sospensione

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated