


## 1332 Globo nero speciale

GLOBI: In policarbonato infrangibile ed autoestinguento V2, stabilizzato ai raggi UV, antiingiallimento, stampati ad iniezione con un procedimento di soffiaggio. Caratterizzati da un'ottima trasparenza che consente la trasmissione ideale del flusso luminoso.

NORMATIVA: Prodotti in conformità alle vigenti norme EN60598-1 CEI 34-21, sono protetti con il grado IP65IK08 (basi+globi) secondo le norme EN60529.

Da utilizzare con la base acc. 1313 e con lamellare acc. 1329.  $\phi 400 = \text{max } 70\text{W}$  -  $\phi 500 = \text{max } 100\text{W}$ .

Ottica antinquinamento luminoso, rispetta le normative regionali, per maggiori informazioni richiedere in sede.

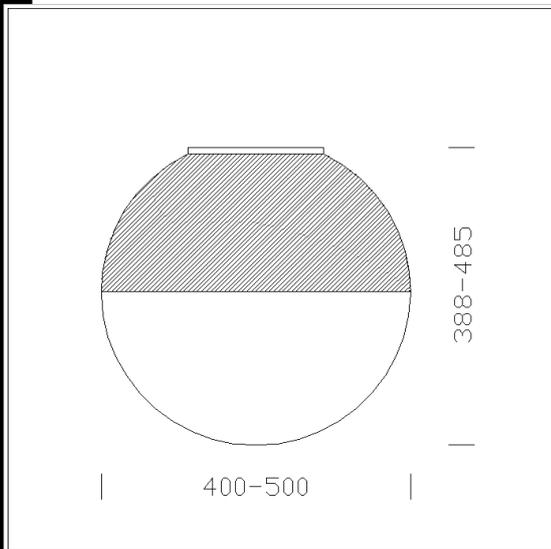

Code	Kg	WTot	Colour
425646-0016	1,40	0 W	NERO
425645-0016	1,20	0 W	NERO

### Accessori




- 1329 lamellare zona 2



- 1326 Attacco plafone lungo



- 1324 Attacco a sospensione



### Download

DXF 2D  
- acc 1331\_1332.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated