

Download

DXF 2D

- d1365.dxf

3DS

- disano_1365.3ds

3DM


- disano_1365.3dm


1365 Flangia Ø100

In alluminio pressofuso, verniciatura per cataforesi epossidica, nera e finitura bugnata.

Per irrigidimento della composizione, completo di 6 settori ferma-bracci.

Da utilizzare con il braccio acc. 1373.

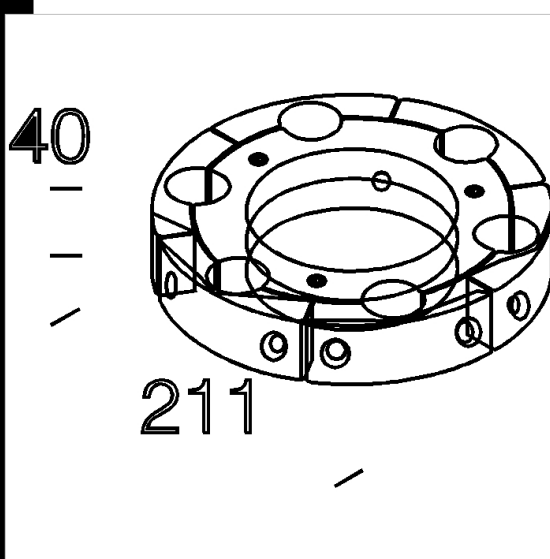

Code	Kg	WTot	Colour
426989-00	0,42	0 W	GREY9007
426982-00	0,42	0 W	NERO

Pali


- 1408 Palo rigato Ø100 con



- 1409 Palo rigato Ø100

Prodotti


- 1203 Kenia


 - 3124 Ghost - luce
diretta/indiretta


- 3172 Montecarlo



- 3174 Montecarlo con vetro



- 1502 Polar



- 1320 Base grande



- 1214 Clima


 - 3114 Ghost - luce
diretta/indiretta

 - 1313 Base alluminio -
cablaggio CNRL

 - 1313 Base alluminio -
cablaggio S/CNR


- 1504 Clima



- 1514 Clima per zona 1



- 3171 Montecarlo - asimmetrico


 - 3175 Montecarlo LED -
diffondente con lenti ellittiche


- 1517 Clima LED


 - 1518 Clima LED anti-
inquinamento luminoso


- 1202 Polar


 - 1335 Globo LED anti-
inquinamento luminoso


- 1512 Bastia - LED



- 1221 Bastia

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1365 Flangia ø100

Prodotti



- 1204 Clima

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated