

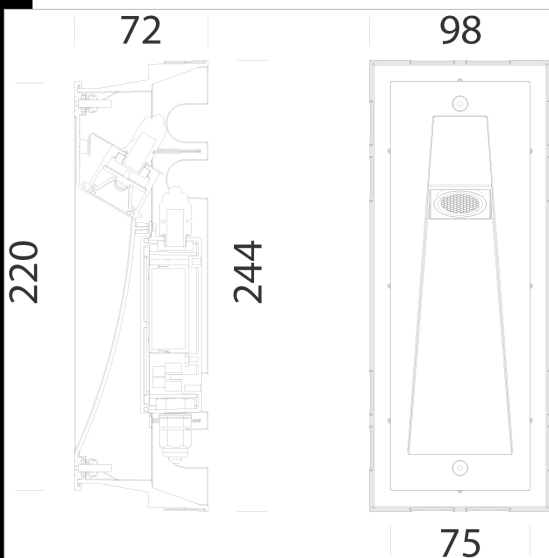


1676 Spy

Corpo: in alluminio pressofuso. Cablaggio: con alimentatore incorporato.
LED: Mantenimento del flusso luminoso al 70%: 25.000h (L70B50).

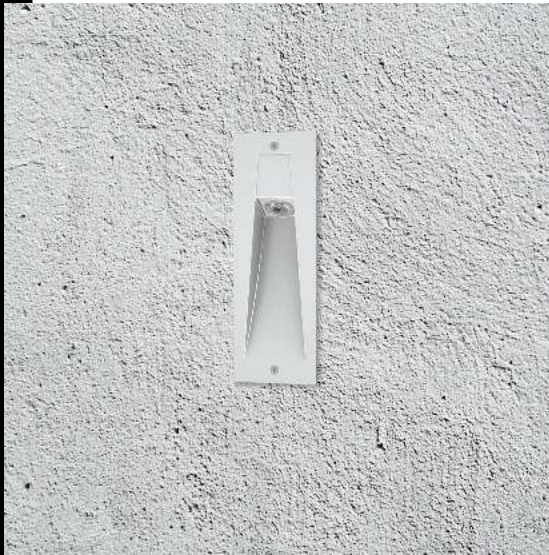

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530683-00	CLD	0,41	LED-150lm-4000K-24°-CRI 80	2 W	GREY9007

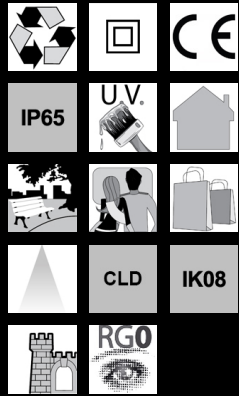

Download

DXF 2D
- 1676b.dxf

Montaggi
- spy 07-20.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated