

1871 Midifloor LED fullcolor - orientabile



Le luci d'accento mettono in risalto i dettagli e aggiungono una terza dimensione agli oggetti.

Si applica allo stile classico e allo stile moderno, producendo lo stesso effetto...

CORPO: In alluminio pressofuso con controcassa in nylon f.v. carico max 3000Kg

DIFFUSORE: In vetro temperato resistente agli shock termici, agli urti.

CORNICE: In acciaio inox AISI 316L.

EQUIPAGGIAMENTO: Guarnizione di tenuta in gomma silconica e EPDM.

NORMATIVA: Prodotti in conformità alle norme EN60598 - CEI 34 - 21. Hanno grado di protezione secondo le norme EN60529.

Classificazione rischio fotobiologico: Gruppo esente




Download

DXF 2D
- 18711872.dxf

Montaggi
- midifloor 05-21.pdf

BIM
- 1871 Midifloor LED fullcolor - swivelling - 20200611.zip

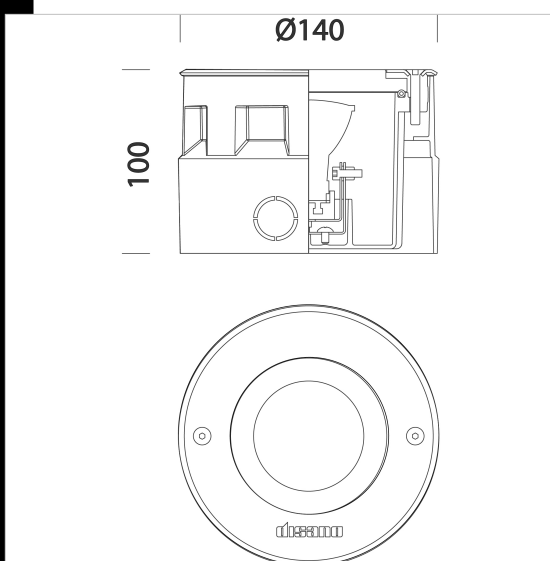

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530790-00	CLD S+L	1,07	LED RGB Fullcolor-105lm--	4 W	INOX

Accessori



- 61 Cassetta stagna IP65



- 64 ricevitore IRE



- 62 Amplificatore/rimodulatore



- 63 Cassetta IP65 alimentatore



- 65 telecomando RGB

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated