


508 - Braccio doppio

In acciaio, idoneo per l'installazione su pali con attacco Ø60.

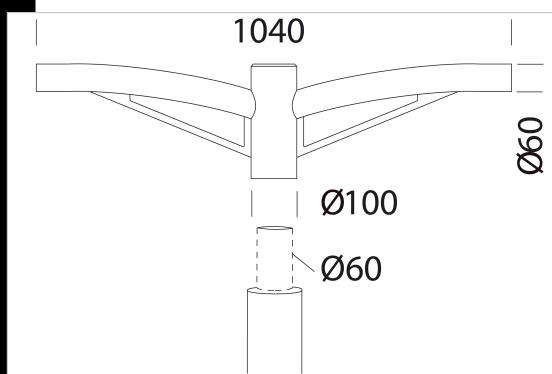

Code	Kg	WTot	Colour
991266-00	9,00	0 W	GREY9007
991267-00	9,10	0 W	GRAFITE
991265-00	9,00	0 W	ANTRACITE

Prodotti



- 3270 Stelvio 1 - Plus - LED



- 3273 Stelvio 1 - Plus S - LED



- 3275 Mini Stelvio - stradale



- 3276 Mini Stelvio - asimmetrico



- 3280 Rolle - T1



- 3277 Mini Stelvio FX T2 - stradale



- 3278 Mini Stelvio FX T3 - diffusore stradale



- 3279 Mini Stelvio FX T4 - asimmetrico



- 3269 Mini Stelvio FX T5 - diffusore



- 3281 Rolle - T2



- 3282 Rolle - T3



- 3283 Rolle - T4



- 3284 Rolle - T5



- 3274 Stelvio 2 - Plus - LED asimmetrico



- 3290 Sella 1 - ST



- 3291 Sella 1 - STWB



- 3292 Sella 1 - asimmetrico 45°



- 3293 Sella 1 - asimmetrico 60°



- 3294 Sella 1 - piste ciclabili



- 3295 Sella 1 - grandi aree




































Download

DXF 2D
- 508.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

508 - Braccio doppio

Prodotti

	- 3375 Mini Stelvio - high performance - stradale		- 3376 Mini Stelvio - high performance - grandi aree		- 3370 Stelvio - high performance - stradale		- 3374 Stelvio - high performance - grandi aree
	- 3296 Sella 1 - HP		- 3396 Sella 2 - HP		- 3393 Sella 2 - Asimmetrico 60°		- 3480 Mini Giovi - high performance - grandi aree
	- 3481 Mini Giovi - high performance - stradale ME		- 3482 Mini Giovi - high performance - ciclabile		- 3475 Mini Giovi W1 - stradale		- 3476 Mini Giovi W2 - stradale
	- 3477 Mini Giovi N1 - ciclabile		- 3478 Mini Giovi M1 - stradale		- 3479 Mini Giovi T4 - grandi aree		- 3486 Mini Giovi sinistro (SX)- attraversamenti pedonali
	- 3487 Mini Giovi destro (DX)- attraversamenti pedonali		- 3483 Mini Giovi AMBRA - grandi aree		- 3484 Mini Giovi AMBRA - stradale ME		- 3485 Mini Giovi AMBRA - ciclabile
	- 3490 Giovi - high performance - grandi aree		- 3491 Giovi - high performance - stradale ME		- 3473 Giovi W1 - stradale		- 3495 Giovi W2 - stradale
	- 3472 Giovi M1 - stradale		- 3474 Giovi M2 - stradale		- 3496 Giovi - sinistro (SX)-		- 3497 Giovi - destro (DX)-
	- 3494 Giovi T4 - asimmetrico -		- 3492 Giovi AMBRA T4 - grandi		- 3493 Giovi AMBRA - stradale		- 3297 Sella 1 - HP -
	- 3298 Sella 1 - HP -						

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated