


2512 Matassa








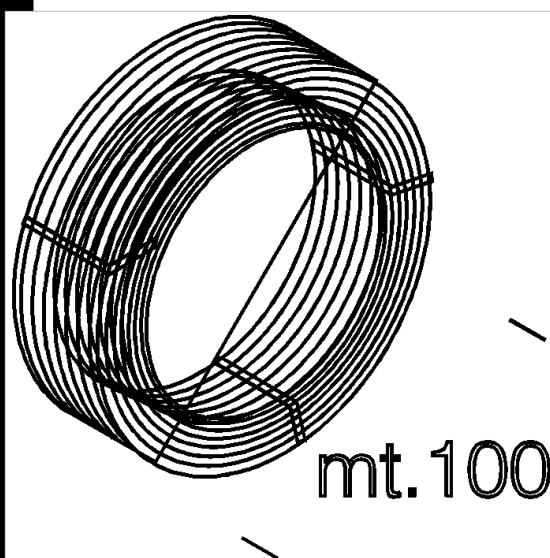










In cavetto d'acciaio, diam. 1,5 mm.



Download
DXF 2D
- d2512.dxf

Code	Kg	WTot	Colour
994018-00	0,10	0 W	ACCIAIO

Prodotti

 - 773 Comfort T8 - ottica	 - 3120 Ghost - diffusore	 - 775 Comfort T8 - ottica satinata	 - 3113 Ghost - luce
 - 3112 Ghost - diffusore verniciato	 - 727 Comfort T8 - diffusore ghiacciato	 - 3123 Ghost - luce diretta/indiretta	 - 777 Comfort T8 - ottica satinata rigata
 - 3121 Ghost - diffusore interno metallizzato	 - 774 Comfort T8 - ottica speculare 99.85	 - 776 Comfort T8 - ottica satinata	 - 753 Minicomfort ottica speculare 99.85
 - 773 Comfort T5 - ottica speculare 99.99	 - 775 Comfort T5 - ottica satinata 99.99	 - 750 Minicomfort T5 ottica speculare 99.99	 - 3110 Ghost - diffusore trasparente
 - 3111 Ghost - diffusore interno	 - 3122 Ghost - diffusore		

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated