




Télécharger
Montaggi
- 600 02-20.pdf

600 EM power kit

Kit d'alimentation EM complet avec connecteurs.
98660400 kit 1h
98660431 kit 3h

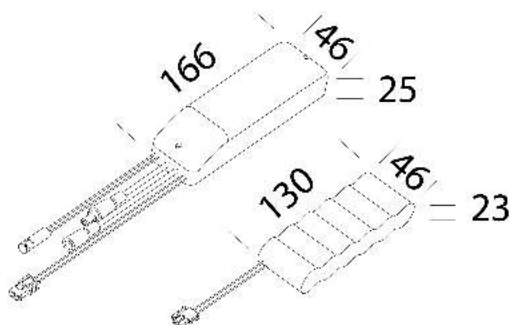

Code	Kg	WTot
986604-00	0.40	0 W
986604-31	0.34	0 W

Produits

 - 840 LED Panel - UGR<19 -	 - 840 LED Panel R - UGR<19 -	 - 842 LED Panel - UGR<19 -	 - 842 LED Panel R - UGR<19 -
 - 916 Ibis - UGR<16	 - 832 Rodi UGR<22	 - 844 LED Panel HE - UGR<19 - DIP SWITCH	 - 854 Heron - UGR<19
 - 754 Heron - UGR<19	 - 832 Rodi R UGR<22	 - 830 Rodi UGR<19	 - 830 Rodi R UGR<19
 - 810 Comfortsquare - 76° - DIP SWITCH	 - 811 Comfortsquare - 43° - DIP SWITCH	 - 833 Creta - UGR<17	 - 831 Rodi IP65 - UGR<22
 - 831 Rodi R IP65 - UGR<22			

Le flux lumineux mentionné est le flux lumineux sortant du luminaire, avec une tolérance de $\pm 10\%$ par rapport à la valeur indiquée. Les W totaux expriment la puissance totale consommée par le système avec une tolérance maximale de 10%