


777 Comfort T8 - matt scored

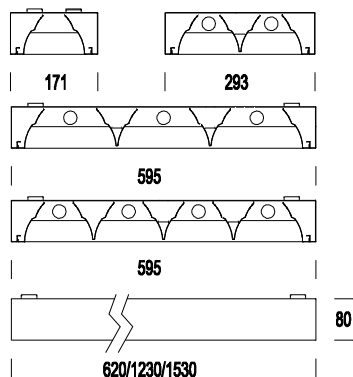

Code	Gear	Kg	Colour	Dimensions	lamp
141201-08	CEL	3.40	white	1230x171x80	FL 1x36-G13-3350lm-4000K-Ra 1b
141202-08	CEL	4.10	white	1530x171x80	FL 1x58-G13-5200lm-4000K-Ra 1b
141203-08	CEL	2.80	white	620x293x80	FL 2x18-G13-1350lm-4000K-Ra 1b
141204-08	CEL	4.50	white	1230x293x80	FL 2x36-G13-3350lm-4000K-Ra 1b
141205-08	CEL	5.40	white	1530x293x80	FL 2x58-G13-5200lm-4000K-Ra 1b
141206-08	CEL	7.50	white	1230x595x80	FL 3x36-G13-3350lm-4000K-Ra 1b
141207-08	CEL	4.30	white	620x595x80	FL 4x18-G13-1350lm-4000K-Ra 1b
141208-08	CEL	7.70	white	1230x595x80	FL 4x36-G13-3350lm-4000K-Ra 1b
141201-09	CEL-E	4.00	white	1230x171x80	FL 1x36-G13-3350lm-4000K-Ra 1b
141202-09	CEL-E	4.70	white	1530x171x80	FL 1x58-G13-5200lm-4000K-Ra 1b
141204-09	CEL-E	5.10	white	1230x293x80	FL 2x36-G13-3350lm-4000K-Ra 1b
141205-09	CEL-E	6.00	white	1530x293x80	FL 2x58-G13-5200lm-4000K-Ra 1b
141206-09	CEL-E	8.10	white	1230x595x80	FL 3x36-G13-3350lm-4000K-Ra 1b
141207-09	CEL-E	4.90	white	620x595x80	FL 4x18-G13-1350lm-4000K-Ra 1b
171208-09	CEL-E	8.20	white	1230x595x80	FL 4x36-G13-3350lm-4000K-Ra 1b

Housing: In sheet steel.
Optics: Matt louvre.

Painting: with polyester powder, UV-stabilized.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.

Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath resistant up to 90°, according to CEI 20-20 standards. 2P+T terminal block with maximum allowed lead cross section of 2.5 sq mm.

Standard supply: Snap fastening optics, which remain attached by safety cords.

Mounting: Ceiling or suspension.

Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP20IK07 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.

Emergency light version: in maintained version. In the event of a "black out", one single lamp connected to the back-up circuit stays on. Run time 60 minutes. Sketch (see chapter).

Versions with 3-hour battery life upon request.