

IK09	CNRL	CELL
	ZONA 1	IP66
		EL

- Download**
- DXF 2D
- 3302.dxf
 - 3DS
- disano_3302_visconti.3ds
 - 3DM
- disano_3302_visconti.3dm
 - Montaggi
- visconti-3302-4-5-6-8-9.pdf



3302 Visconti 3

Visconti is the new urban lighting system that enables designers to get the best performance from the new light sources (LED and white light), with all the quality of the 'made in Italy' design.

The fixture's exclusive design is enhanced with an innovative pole, which is a visible sign of the changes occurred in the new town planning and redevelopment projects.

Visconti is best suited to illuminate main streets in residential centres. As a wall-mounted fixture, it is the perfect solution to establish a dialogue between classic and modern architecture, while the suspended version enables a calibrated and wise use of light.

All the experience and quality of Disano products lie in the materials and technology of its products combined with easy installation and maintenance.

Housing/Frame: in die-cast aluminium.

Optics: In 99.85 aluminium, anodically oxidized and polished.


Diffuser: tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150 tests - 1/2001)

Coating: in different stages. By epoxy cationic electrocoating, resistant to corrosion and saline environments. Second coating using graphite grey acrylic resin, UV stabilized.

Standard supply: in case of maintenance, the frame remains suspended by way of brackets once opened. Standard knife switch and quick connector for connection to the line. Wiring on removable tray for easy maintenance.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

Always use with acc. 280/81/82 or 283

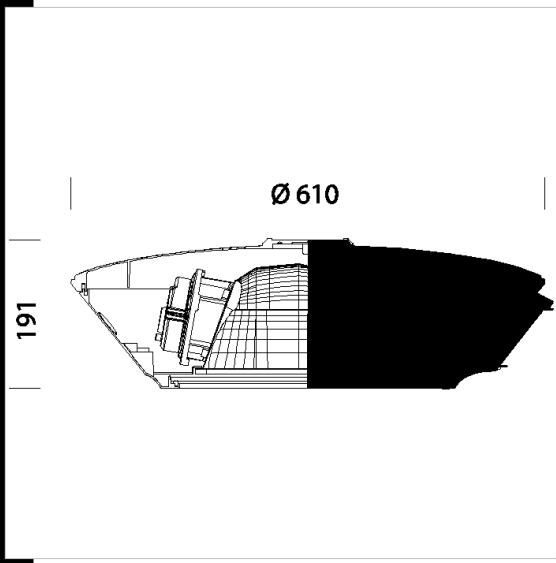

Code	Gear	Kg	Watt	Base	Lamps	Colour
328020-00	CNR-L	11,22	SAP-T 70	E27	6000lm-2000K-Ra 4	GRAPHITE
328021-00	CNR-L	11,76	SAP-T 100	E40	9000lm-2000K-Ra 4	GRAPHITE
328022-00	CNR-L	12,34	SAP-T 150	E40	17200lm-2000K-Ra 4	GRAPHITE
328023-00	CNR-L	11,52	CDO-TT 70	E27	6300lm-2800K-Ra 1b	GRAPHITE
328024-00	CNR-L	11,60	CDO-TT 100	E40	8800lm-2800K-Ra 1a	GRAPHITE
328025-00	CNR-L	12,18	CDO-TT 150	E40	13500lm-2800K-Ra 1b	GRAPHITE
328026-00	CELL	10,32	CPO-TW 60	PGZ12	6850lm-2800K-Ra 2a	GRAPHITE
328027-00	CELL	10,38	CPO-TW 90	PGZ12	10450lm-2880K-Ra 66	GRAPHITE
328028-00	CELL	10,78	CPO-TW 140	PGZ12	16500lm-2800K-Ra 2a	GRAPHITE

Accessories

- 283 Wall mounting	- 281 Arm	- 282 Double Arm	- 280 fork
- 528 union			

Posts

- 1417 pole with base ø102-159	- 1418 poles to be sunk into the ground ø102-159	- 1485 pole with base - Visconti	- 1487 poles to be sunk into the ground - Visconti
--------------------------------	--	----------------------------------	--