


**Download**

- DXF 2D  
- 1720\_iridio.dxf
- Montaggi  
- valvola\_anticondiridio.dxf  
- iridio 1719-20.pdf



**1720 Iridio symmetric**

Housing/frame: Fibreglass reinforced plastic material.  
 Hooks: Fibreglass nylon.  
 Reflector: Symmetric made of anodised, anodised and polished hammered aluminium 99.85.  
 Diffuser: Tempered glass, 5 mm thick, resistant to impact and thermal shock  
 Lampholder: Ceramic with silver-plated contacts  
 Electric gear: 230V-50Hz power supply with heat protection. Wire terminated with admiralty brass clamps, silicone insulation with fibreglass braid; cross section: 1 sqmm. 2P terminal block (maximum allowed lead cross section 4 sqmm.)  
 Equipment: Silicone rubber gasket. Fibreglass nylon cable gland, Ø ½ " gas. Retained steel screws with special anticorrosion and anti-gripping treatment. Black painted steel bracket with protractor scale. The hinged front frame can be opened without tools, and stays attached to the housing for easy maintenance. Equipped with an air-circulation valve. Knife switch included in standard supply.  
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.  
 Wind surface: 1200 cm².

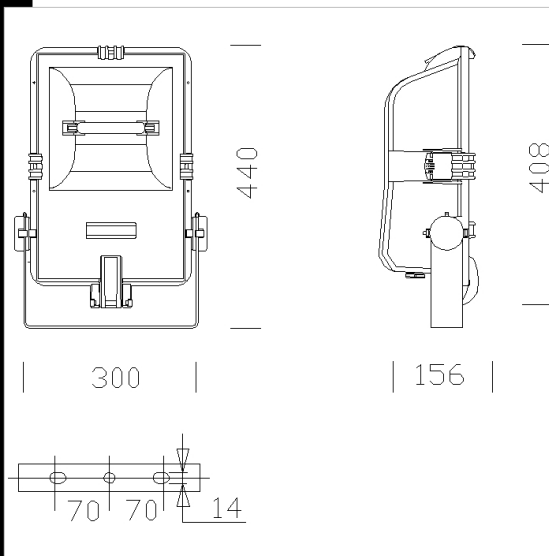

| Code      | Gear  | Kg   | Watt        | Base    | Lamps               | Colour      |
|-----------|-------|------|-------------|---------|---------------------|-------------|
| 411732-00 | CNR-L | 5,80 | JM-TS 150   | Rx7s    | 12500lm-4200K-Ra 1b | BLACK       |
| 411736-01 | CELL  | 0,00 | FLC 1x42T/E | Gx24q-4 | 3200lm-4000K-Ra 1b  | BLACK       |
| 411740-00 | CNR-L | 5,20 | JM-TS 70    | Rx7s    | 6500lm-4200K-Ra 1b  | MET. SILVER |
| 411742-00 | CNR-L | 5,83 | JM-TS 150   | Rx7s    | 12500lm-4200K-Ra 1b | MET. SILVER |
| 411741-00 | CNR-L | 5,20 | SAP-TS 70   | Rx7s    | 6800lm-2000K-Ra 4   | MET. SILVER |
| 411745-00 | CNR-L | 5,00 | SAP-E 70    | E27     | 5600lm-2000K-Ra 4   | MET. SILVER |
| 411730-00 | CNR-L | 5,19 | JM-TS 70    | Rx7s    | 6500lm-4200K-Ra 1b  | BLACK       |
| 411735-00 | CNR-L | 5,00 | SAP-E 70    | E27     | 5600lm-2000K-Ra 4   | BLACK       |
| 411744-00 | CNR-L | 5,40 | JM-E 100    | E27     | 9000lm-3200K-Ra 2a  | MET. SILVER |
| 411731-00 | CNR-L | 5,20 | SAP-TS 70   | Rx7s    | 6800lm-2000K-Ra 4   | BLACK       |
| 411735-01 | CNR-L | 5,00 | SAP-E 70    | E27     | 5600lm-2000K-Ra 4   | BLACK       |
| 411736-00 | CELL  | 5,40 | FLC 1x42T/E | Gx24q-4 | 3200lm-4000K-Ra 1b  | BLACK       |
| 411743-00 | CNR-L | 5,80 | SAP-TS 150  | Rx7s    | 15000lm-2000K-Ra 4  | MET. SILVER |
| 411734-00 | CNR-L | 5,40 | JM-E 100    | E27     | 9000lm-3200K-Ra 2a  | BLACK       |
| 411733-00 | CNR-L | 5,80 | SAP-TS 150  | Rx7s    | 15000lm-2000K-Ra 4  | BLACK       |

**Accessories**



- 175 protective guard



- 176 baffle louvre