

1755 Monza - with flat glass

Housing: die cast aluminium.
Reflector: ANTI-LIGHT POLLUTION OPTICS. Produced using 99.85 moulded, anodically oxidised and polished aluminium, with flux recovery.
Diffuser: 5 mm. thick, toughened glass, withstands thermal shocks and impacts (tested according to UNI EN 12150-1: 2001).

Painting: In several stages. epoxy cationic electrocoating, resistant to corrosive and saline environments, UV stabilising priming; lastly a rough finish with frosted silver.


Wiring: 230V/50Hz power supply with ballast conventional or electronic
Flexible cable, terminated with quick connector tin-plated brass tips, with double silicon insulation, 1.0 mm² cross-section. 2P terminal strip with maximum permitted cross-section of conductors: 2.5 mm².

Complete with: Wiring on removable plate with quick connectors to connect to the line and the lampholder.

Equipment: The cover remains attached during maintenance operations by means of a side spring. Gasket made from ecological material. Rotating connection with goniometric scale to adjust the housing and with isolating switch supplied as a standard feature.

Standards: Products comply with current EN 60598 standards. With IP66IK08 protection in accordance with EN60529. Insulation class: II.

Monza is already available with white light lamps (CPO-TW)
"A new urban lighting concept that uses white light: white light clearly offers numerous advantages in terms of chromatic yield, quality, safety, illuminance and power-savings".

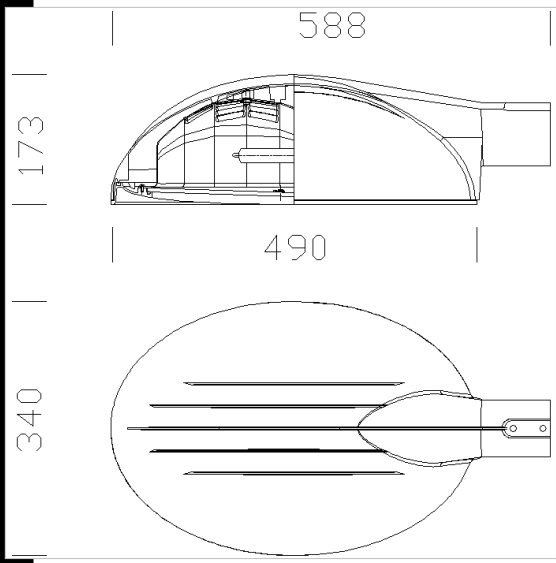

Download

- DXF 2D
- 1754-55.dxf
- 3DS
- 1755_monza.3ds
- 3DM
- 1755_monza.3dm
- Montaggi
- monza.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
423056-00	CELL	6,00	CDM-T 150	G12	12700lm-4200k-Ra 2a	SANDBLASTED SILVER
423051-00	CELL	6,00	CDM-T 70	G12	6600lm-3000K-Ra 1b	SANDBLASTED SILVER
423058-00	CNR-L	6,00	CDM-T 150	G12	14000lm-3000K-Ra 1b	SANDBLASTED SILVER
423057-00	CNR-L	6,00	CDM-T 70	G12	6600lm-3000K-Ra 1b	SANDBLASTED SILVER
423054-00	CELL	6,00	CPO-TW 90	PGZ12	10450lm-2880K-Ra 66	SANDBLASTED SILVER
423055-00	CELL	6,00	JM-E 100	E27	9000lm-3200K-Ra 2a	SANDBLASTED SILVER
423052-00	CELL	6,00	CPO-TW 60	PGZ12	6850lm-2730K-Ra 66	SANDBLASTED SILVER

Accessories

