


Stilo BC - 2x - Sospensione

Corpo: in alluminio trattato.
 Mantenimento del flusso luminoso al 80%: 50000h (L80B20).
 Normative: prodotti in conformità alle vigenti norme CEI 34-21, CEI EN 60598-1, CEI EN 60598-2-1, CEI EN 60598-2-2.

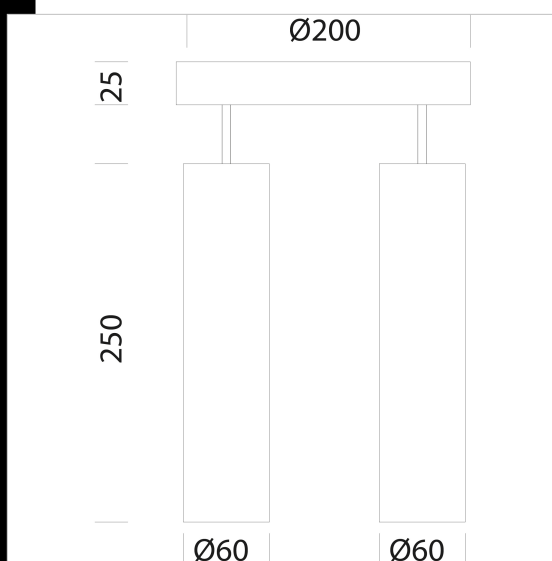

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22045710-00	CLD	0,60	LED2x-893lm-3000K-40°-CRI 90	24 W	BIANCO
22045730-00	CLD	0,60	LED2x-893lm-3000K-40°-CRI 90	24 W	NERO
22045760-00	CLD	0,60	LED2x-893lm-3000K-40°-CRI 90	24 W	CROMATO
22045610-00	CLD-DI	0,60	LED2x-893lm-3000K-40°-CRI 90	24 W	BIANCO
22045630-00	CLD-DI	0,60	LED2x-893lm-3000K-40°-CRI 90	24 W	NERO
22045660-00	CLD-DI	0,60	LED2x-893lm-3000K-40°-CRI 90	24 W	CROMATO
22045710-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	BIANCO
22045730-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	NERO
22045760-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	CROMATO
22045610-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	BIANCO
22045630-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	NERO
22045660-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	CROMATO
22045710-68	CLD CELL	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	BIANCO
22045730-68	CLD CELL	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	NERO
22045760-68	CLD CELL	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	CROMATO
22045610-1213	CLD CELL-DI	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	BIANCO
22045630-1213	CLD CELL-DI	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	NERO
22045660-1213	CLD CELL-DI	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	CROMATO
22045710-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	BIANCO
22045730-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	NERO
22045760-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	CROMATO
22045610-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	BIANCO
22045660-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	NERO
22045630-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	CROMATO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated