
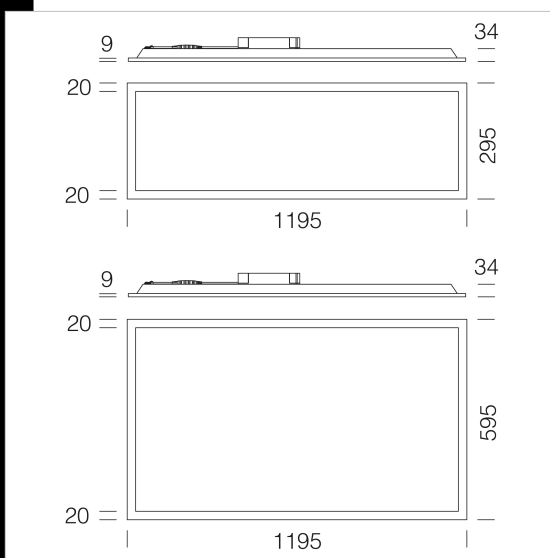


832 Rodi R UGR<22

Rodi is the new recessed LED backlighting ceiling fixture that opens up a whole different way of thinking about artificial lighting. With a very slender design and high-efficiency 4000K LED sources, Rodi offers a very bright and diffused lighting, while keeping energy consumptions extremely low and setting itself as the ideal solution for general and functional lighting applications. Housing and frame: housing in galvanised steel sheet, and frame in aluminium, contact mounting on the cross T structure. Diffuser: in opal engineering plastic with high thermal transmittance. Wiring: rapid wiring connection, the fixture does not need to be opened.

UGR glare index:  
UGR<22 (in any situation). - EN 12464. LED: Luminous flux maintenance 80%; 50.000h (L80B20). Power factor 0.95. Photobiological safety class: exempt group.

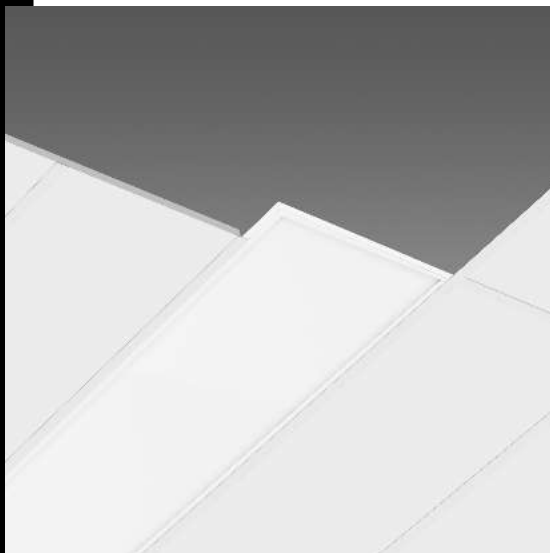

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
150233-00	CLD	1,98	LED-4374lm-4000K-CRI 80	39 W	WHITE
150234-00	CLD	4,26	LED-8070lm-4000K-CRI 80	78 W	WHITE

Accessori



- 320 steel safety cord



- 2520 simple suspension



- 907 Springs



- 600 EM power kit



- 595 frame 1200x300 h70mm



Download

DXF 2D  
- 832dr.dxf

Montaggi

- 600 02-20.pdf  
- rodi 06-20.pdf  
- 595 01-20.pdf

BIM

- 832 Rodi UGR22 - 20210216.zip  
- 832 Rodi UGR22 + Acc.595 - 20210216.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated