



Download

DXF 2D
- d784.dxf

Montaggi
- compact.pdf



784 Compact - frosted diffuser

Housing: in sheet steel.

Reflector: In vandal-resistant, V2 self-extinguishing polycarbonate, metallized with a C.V.D. high vacuum process using high grade aluminium powders, for better light control and luminous efficiency.

Diffuser: In clear, frosted, antidazzle plexiglass.

Painting: with white acrylic powder, colour white, UV-stabilized, upon phosphate treatment.

Lampholder: In polycarbonate with phosphor bronze contacts. Sockets G24d-3: G24q-3.


Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards, 2P + T terminal block in polycarbonate with maximum allowed lead cross section of 2.5 sqmm.

Equipment: Finish ring with safety springs.

Mounting: Ceiling.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK04 degree of protection according to EN 60529 standards.

This product can be installed on normally inflammable surfaces.

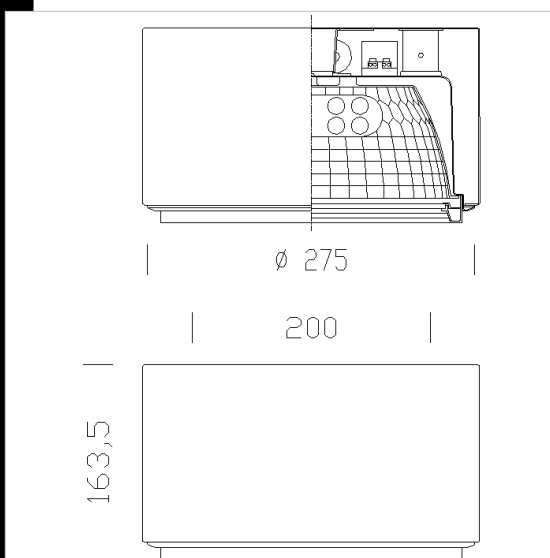

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
156322-08	CELL	2.10	FLC 2x18D/E-1200lm-4000K-Ra 1b	38 W	G24q-2	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated