



Micro Liset - 4000K - CRI 80

Led's open up amazing and unexpected lighting possibilities. The Microliset series ensure excellent light flux with a very high colour performance. A ground-breaking system that can electronically mix colours. Long-lasting, reliable fixtures need little maintenance. Excellent versatility, elegant and non-invasive, these luminaires provide perfect lighting without being seen.

Housing: made of oxidized extruded aluminium.

Diffuser: made of clear polycarbonate,


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Use transformer acc. 22092022-00 (MAX 70W) or 22090839-00 (MAX 20W). DIM 22090840-00

Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

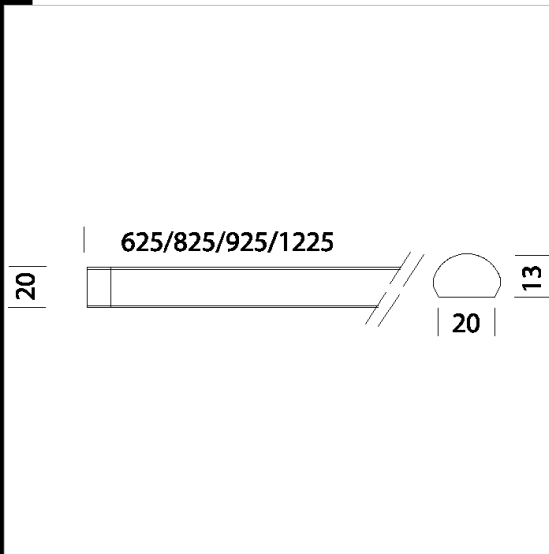

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22017673-00	CLD S+L	1,50	LED-684lm-4000K-CRI 80	5 W	OXIDIZEDD
22017278-00	CLD S+L	0,45	LED-2736lm-4000K-CRI 80	22 W	OXIDIZEDD
22017273-00	CLD S+L	0,25	LED-998lm-4000K-CRI 80	11 W	OXIDIZEDD
22017274-00	CLD S+L	0,35	LED-2052lm-4000K-CRI 80	20 W	OXIDIZEDD
22017678-00	CLD S+L	1,50	LED-998lm-4000K-CRI 80	11 W	OXIDIZEDD

Accessori



- Bracket - Microliset



- IP20 Microliset box



- Dimmable power supply



- Dimmable Interface - Microliset



- Adjustable Bracket - Microliset



- Screen for Microliset's profile



- Profile for Microliset

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated