

**Download**

DXF 2D  
- ispot3.dxf

Montaggi  
- LOWGLARE FENIX -ISPOT1-2-3  
rev0.pdf

## iSpot 3

The ideal retrofit of existing ISPOT spotlights, it represents the technological benchmark of recessed spotlights. The main advantages of this latest generation product are energy-efficiency, great flexible use and superior lighting quality.

With latest generation LEDs you can save up to 80% of energy compared to old products, plus a service life that can reach up to 50,000 hours guaranteeing an excellent luminous flux. The high quality of these spotlights is also guaranteed by specific colour temperatures (3000K - 4000K) and anti-glare optics.

Housing: made in aluminum adjustable with springs.

Specific optical anti-glare for improved comfort.

Coating: Power-coated with a UV-resistant polyester paint.

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

Dimmable with IGBT dimmer dimming devices (for example, with halogen lights DIM IGBT)


Can be installed in a hole at least 64 mm up to ø88

Power factor: >= 0.9

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

Lower lamp wattages means greater economy, more than 70% saving

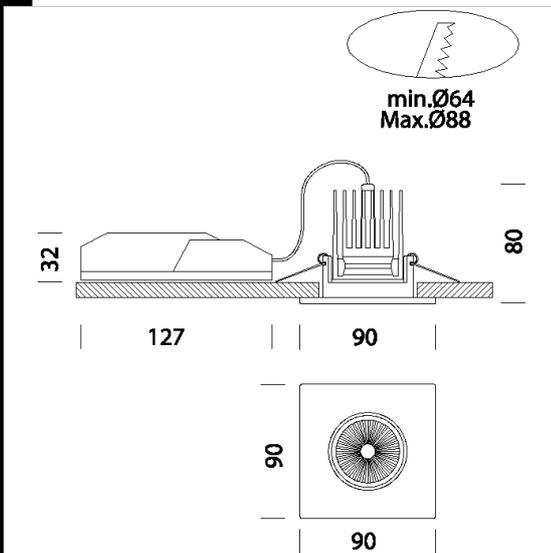

| Code          | Gear          | Kg   | Lumen Output-K-CRI             | WTot | Colour |
|---------------|---------------|------|--------------------------------|------|--------|
| 22067460-00   | CLD CELL-DI   | 0,35 | LED COB-957lm-3000K-38°-CRI 92 | 10 W | CHROME |
| 22067460-1213 | CLD CELL-DI   | 0,35 | LED COB-990lm-4000K-38°-CRI 92 | 10 W | CHROME |
| 22067460-1241 | CLD CELL-D-D  | 0,35 | LED COB-957lm-3000K-38°-CRI 92 | 10 W | CHROME |
| 22067460-6841 | CLD CELL-D-D  | 0,35 | LED COB-990lm-4000K-38°-CRI 92 | 10 W | CHROME |
| 22067460-09   | CLD CELL-DI-E | 0,82 | LED COB-957lm-3000K-38°-CRI 92 | 10 W | CHROME |
| 22067460-6809 | CLD CELL-DI-E | 0,85 | LED COB-990lm-4000K-38°-CRI 92 | 10 W | CHROME |
| 22067460-31   | CLD CELL-DI-E | 0,85 | LED COB-957lm-3000K-38°-CRI 92 | 10 W | CHROME |
| 22067460-3113 | CLD CELL-DI-E | 0,85 | LED COB-990lm-4000K-38°-CRI 92 | 10 W | CHROME |

**Accessori**



- Protective grig

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated