


Techno B 140 - TOTAL WHITE

Housing: in die cast aluminium with clear polycarbonate diffuser.
 Reflector: white oxidised smooth optics. Lens: in PMMA with high efficiency output and very low glare rate. Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.
 Coating: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket. LED: High-efficiency light sources Luminous flux maintenance 80%: 50.000h (L80B20).
 Power factor >0.9 Photobiological safety class: Exempt group.

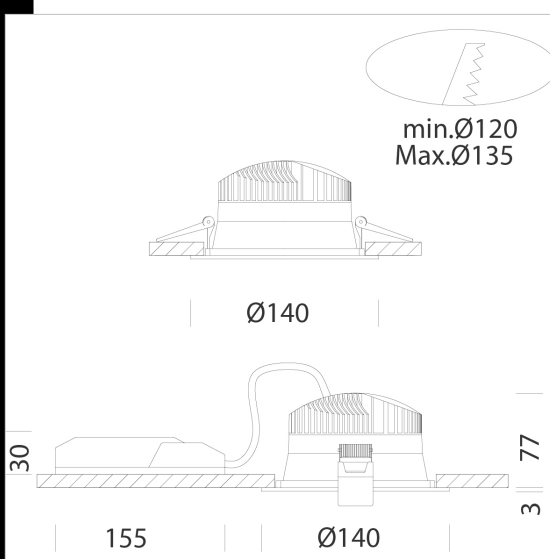

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22163012-00	CLD	0,45	LED COB-1685lm-4000K-CRI 92	16 W	WHITE

Accessori



- EM Kit Q



Download

DXF 2D
 - techno140.dxf

Montaggi
 - TECHNO B rev3.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated