



## Liset 2.0 HE - suspension - direct light - UGR<19

Liset 2.0 HE is a linear and modular lighting system that is easily customisable and capable of offering a series of lighting solutions in any setting, including retailing, artistic and cultural spaces or in entrance lobbies and/or hospitality facilities. Compact, elegant, flexible and small, Liset 2.0 HE is simple to install as a recessed, ceiling, suspension or track lamp. It is available in three versions: with dark light lamellar optics with UGR<19, or with either white or black polycarbonate comfort optics and polycarbonate opal diffuser. The entire range has latest generation 4000K LED sources with 80 CRI, making these products easy to fit into any lighting design project.

Liset 2.0 HE is a real multi-purpose lighting system studied to make the best use of the LED technology. Its clean lines and luminous efficiency ensure extraordinary light and colour effects.

The system's extreme flexibility is guaranteed by the numerous compositions that can be made using the angular module to create ALL LIGHT solutions, which can offer uniform lighting of the space and constant visual comfort.

Housing: made of extruded aluminium.

Heads: in die cast aluminium.

LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor: 0,92. Photobiological safety class: Exempt group.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Diffuser: PMMA


Upon request: available version with pass-through wiring for continuous line mounting with subcode -0072. PUSH-DIMM version with sub-code -1245 or -3945 (3000K).

Suspensions not included, to be purchased separately.

### Download

DXF 2D  
- liset20hesos.dxf

Montaggi  
- LISET 2.0 sosp.plaf. rev3.pdf

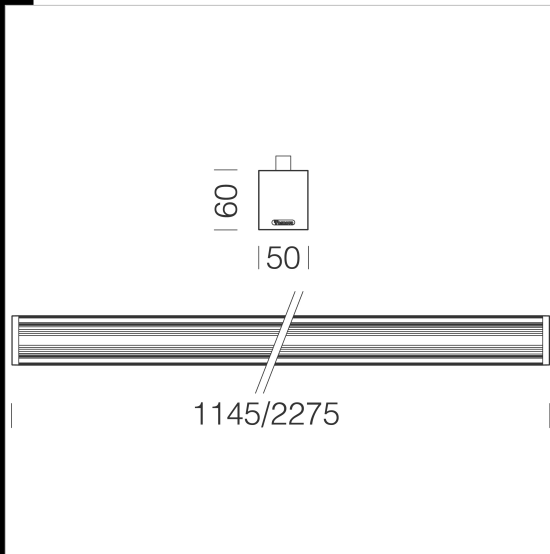

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22303406-00	CLD	2,65	LED-3673lm-4000K-CRI 80	26 W	WHITE
22303436-00	CLD	2,68	LED-3673lm-4000K-CRI 80	26 W	BLACK
22303406-39	CLD	2,66	LED-3416lm-3000K-CRI 80	26 W	WHITE
22303436-39	CLD	2,63	LED-3416lm-3000K-CRI 80	26 W	BLACK
22303407-00	CLD	5,37	LED-7346lm-4000K-CRI 80	52 W	WHITE
22303437-00	CLD	2,50	LED-7346lm-4000K-CRI 80	52 W	BLACK
22303407-39	CLD	5,24	LED-6832lm-3000K-CRI 80	52 W	WHITE
22303437-39	CLD	5,10	LED-6832lm-3000K-CRI 80	52 W	BLACK
22303406-1241	CLD-D-D	2,72	LED-3673lm-4000K-CRI 80	26 W	WHITE
22303436-1241	CLD CELL-D-D	2,50	LED-3673lm-4000K-CRI 80	26 W	BLACK
22303406-3941	CLD CELL-D-D	2,60	LED-3416lm-3000K-CRI 80	26 W	WHITE
22303436-3941	CLD CELL-D-D	5,20	LED-3416lm-3000K-CRI 80	26 W	BLACK
22303407-1241	CLD CELL-D-D	5,00	LED-7346lm-4000K-CRI 80	52 W	WHITE
22303437-1241	CLD CELL-D-D	5,00	LED-7346lm-4000K-CRI 80	52 W	BLACK
22303407-3941	CLD-D-D	5,20	LED-6832lm-3000K-CRI 80	52 W	WHITE
22303437-3941	CLD-D-D	5,17	LED-6832lm-3000K-CRI 80	52 W	BLACK

### Accessori



- Ceiling suspension



- Ceiling suspension O



- Powered suspension O



- 5P Powered suspension



- 5P WIRELESS Powered suspension



- Suspension attachment for track



- Joining bracket - Liset 2.0

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated