




1115 Quark - wide beam

Housing: In die-cast aluminium with wide cooling fins.
 Reflector: In the wide beam version, in pressed prismatic 99.85 anodized aluminium, 6/8 μ thick, polished, for high luminous efficiency.
 Diffuser: Tempered glass, 5 mm thick, thermal shock and impact resistant
 Painting: With polyester powder, black colour, upon chromate treatment, resistant to corrosive and saline environments.
 Lampholder: In ceramics, with silver-plated contacts. Socket E40.
 Electric gear: 230-240V/50Hz power supply. Silicone flexible wire terminated with quick-connect clamps in admiralty brass, with fiberglass braid, 1.0 sqmm cross section. 2P+T terminal block with maximum allowed lead cross section of 4 sqmm.
 Standard supply: The reflector remains hooked to the fixture by means of suspension chains. Removable gear tray for easy maintenance.
 Equipment: Gasket in environment-friendly silicone rubber material. Eyebolt with steel threaded stem.
 Cable gland in f.g. nylon, Ø 1/2 gas thread (cable min Ø 9, max Ø 12).
 Mounting: Ceiling, wall mounting, suspension or installation on art. 6000 industrial track with acc 6037
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ). They have obtained the ENEC European Certificate of Conformity. Moreover, these products can be installed on normally inflammable surfaces.
 Additional gear: With electronic switching device (CLA) for auxiliary lamp or with emergency kit.
 Emergency version: In the event of a blackout, FLC18L lamp connected to the emergency circuit remains on, thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

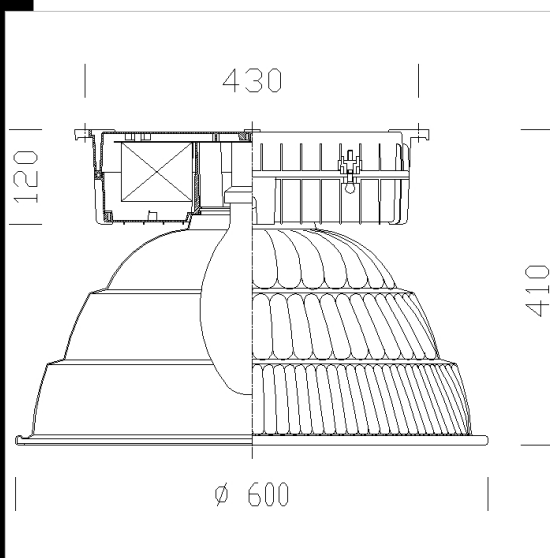

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
321643-00	CNR-L	12.30	SAP-E 250-31200lm-2000K-Ra 4	277 W	E40	GRAPHITE
321642-0064	CNR-L	12.30	JM-E 250-18000lm-4500k-Ra 2b	270 W	E40	GRAPHITE
321642-00	CNR-L	11.28	JM-E 250-18000lm-4500k-Ra 2b	270 W	E40	BLACK
321642-07	CNRL-E	11.62	JM-E 250-18000lm-4500k-Ra 2b	286 W	E40	BLACK
321646-07	CNRL-E	12.72	JM-E 400-32500lm-4500k-Ra 2b	451 W	E40	GRAPHITE
321646-00	CNR-L	12.72	JM-E 400-32500lm-4500k-Ra 2b	437 W	E40	BLACK
321645-00	CNR-L	13.70	SAP-E 400-54000lm-2000K-Ra 4	436 W	E40	GRAPHITE
321645-79	CNR-L	13.70	SAP-E 400-54000lm-2000K-Ra 4	436 W	E40	GRAPHITE
321643-0064	CNR-L	12.30	SAP-E 250-31200lm-2000K-Ra 4	277 W	E40	GRAPHITE
321643-07	CNRL-E	12.30	SAP-E 250-31200lm-2000K-Ra 4	293 W	E40	GRAPHITE
321646-0064	CNR-L	13.70	JM-E 400-32500lm-4500k-Ra 2b	437 W	E40	GRAPHITE
321643-79	CNR-L	12.30	SAP-E 250-31200lm-2000K-Ra 4	277 W	E40	GRAPHITE
321645-0064	CNR-L	13.70	SAP-E 400-54000lm-2000K-Ra 4	436 W	E40	GRAPHITE
321642-79	CNR	11.40	JM-E 250-18000lm-4500k-Ra 2b	270 W	E40	GRAPHITE
321645-07	CNRL-E	13.70	SAP-E 400-54000lm-2000K-Ra 4	451 W	E40	GRAPHITE

Accessories



- 6037 suspension hook



- 1160 guard



- 1161 600 x 600 mm panel



- 1175 Em box



- 1184 adjustable bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated